

 FUZETEC TECHNOLOGY CO., LTD.	NO.	PQ11-01E		
	Product Specification and Approval Sheet	Version	C0	Page

Surface Mountable PTC Resettable Fuse : FSMD2920 Series

1. Summary

- (a) **RoHS Compliant & Halogen Free**
- (b) **Applications : All high-density boards**
- (c) **Product Features : 2920 Dimension, Surface mountable, Solid state, Faster time to trip than standard SMD devices.**
- (d) **Operation Current : 300mA~3.0A**
- (e) **Maximum Voltage : 6V~60V_{DC}**
- (f) **Temperature Range : -40°C to 85°C**

2. Agency Recognition

UL : File No. E211981
 C-UL: File No. E211981
 TÜV: File No. R50090556

3. Electrical Characteristics (23°C)


Part Number	Hold Current	Trip Current	Rated Voltage	Max Current	Typical Power	Max Time to Trip		Resistance	
	I _H , A	I _T , A	V _{MAX} , VDC	I _{MAX} , A	P _d , W	Current	Time	R _{MIN}	R _{1MAX}
						A	Sec	Ohms	Ohms
FSMD030-2920	0.30	0.60	60	100	1.5	1.5	3.0	1.000	4.800
FSMD030-2920-R	0.30	0.60	60	100	1.5	1.5	3.0	1.000	4.800
FSMD050-2920	0.50	1.00	60	100	1.5	2.5	4.0	0.300	1.400
FSMD050-2920-R	0.50	1.00	60	100	1.5	2.5	4.0	0.300	1.400
FSMD075-2920	0.75	1.50	33	100	1.5	8.0	0.3	0.180	1.000
FSMD075-2920-R	0.75	1.50	33	100	1.5	8.0	0.3	0.180	1.000
FSMD075-60-2920-R	0.75	1.50	60	100	1.5	8.0	0.3	0.180	1.000
FSMD100-2920	1.10	2.20	33	100	1.5	8.0	0.5	0.090	0.410
FSMD100-2920-R	1.10	2.20	33	100	1.5	8.0	0.5	0.090	0.410
FSMD100-60-2920R	1.10	2.20	60	100	1.5	8.0	0.5	0.090	0.410
FSMD125-2920	1.25	2.50	33	100	1.5	8.0	2.0	0.050	0.250
FSMD125-2920-R	1.25	2.50	33	100	1.5	8.0	2.0	0.050	0.250
FSMD150-2920	1.50	3.00	33	40	1.5	8.0	2.0	0.050	0.230
FSMD150-2920-R	1.50	3.00	33	100	1.5	8.0	2.0	0.050	0.230
FSMD185-2920	1.85	3.70	33	40	1.5	8.0	2.5	0.040	0.150
FSMD185-2920-R	1.85	3.70	33	100	1.5	8.0	2.5	0.040	0.150
FSMD200-2920	2.00	4.00	16	100	1.5	8.0	4.5	0.035	0.120
FSMD200-2920-R	2.00	4.00	16	100	1.5	8.0	4.5	0.035	0.120
FSMD200-24-2920-R	2.00	4.00	24	100	1.5	8.0	5.0	0.035	0.120
FSMD250-2920	2.50	5.00	16	100	1.5	8.0	16.0	0.025	0.085
FSMD250-2920-R	2.50	5.00	16	100	1.5	8.0	16.0	0.025	0.085
FSMD260-2920	2.60	5.20	6	100	1.5	8.0	20.0	0.020	0.075
FSMD260-2920-R	2.60	5.20	6	100	1.5	8.0	20.0	0.020	0.075
FSMD300-2920	3.00	5.20	6	100	1.5	8.0	25.0	0.010	0.048
FSMD300-2920-R	3.00	5.20	6	100	1.5	8.0	25.0	0.010	0.048
FSMD300-15-2920R	3.00	5.20	15	100	1.5	8.0	25.0	0.010	0.048

NOTE : Specification subject to change without notice.

 FUZETEC TECHNOLOGY CO., LTD.	NO.	PQ11-01E		
	Product Specification and Approval Sheet	Version	C0	Page

I_H =Hold current-maximum current at which the device will not trip at 23°C still air.
 I_T =Trip current-minimum current at which the device will always trip at 23°C still air.
 V_{MAX} =Maximum voltage device can withstand without damage at it rated current.(I_{MAX})
 I_{MAX} = Maximum fault current device can withstand without damage at rated voltage (V_{MAX}).
 P_d =Typical power dissipated-type amount of power dissipated by the device when in the tripped state in 23°C still air environment.
 R_{MIN} =Minimum device resistance at 23°C prior to tripping.
 R_{1MAX} =Maximum device resistance at 23°C measured 1 hour after tripping or reflow soldering of 260°C for 20 seconds.
Termination pad characteristics
Termination pad materials : Pure Tin

4. FSMD Product Dimensions (Millimeters)

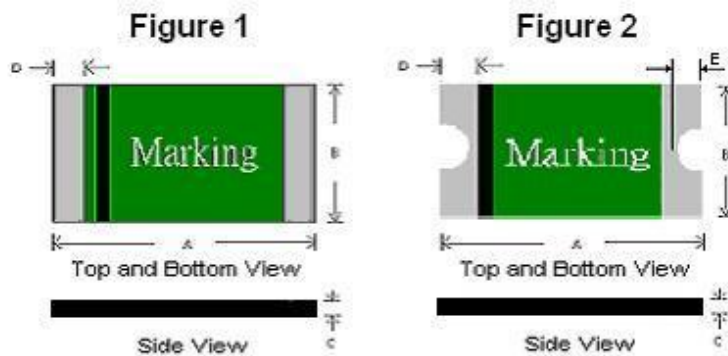


Part Number	Figure	A		B		C		D		E	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
FSMD030-2920	1	6.73	7.98	4.80	5.44	0.60	1.15	0.35	—	—	—
FSMD030-2920-R	2	6.73	7.98	4.80	5.44	0.60	1.15	0.50	1.20	0.50	0.90
FSMD050-2920	1	6.73	7.98	4.80	5.44	0.60	1.15	0.35	—	—	—
FSMD050-2920-R	2	6.73	7.98	4.80	5.44	0.60	1.15	0.50	1.20	0.50	0.90
FSMD075-2920	1	6.73	7.98	4.80	5.44	0.40	1.15	0.35	—	—	—
FSMD075-2920-R	2	6.73	7.98	4.80	5.44	0.40	1.15	0.50	1.20	0.50	0.90
FSMD075-60-2920-R	2	6.73	7.98	4.80	5.44	0.60	1.15	0.50	1.20	0.50	0.90
FSMD100-2920	1	6.73	7.98	4.80	5.44	0.40	1.00	0.35	—	—	—
FSMD100-2920-R	2	6.73	7.98	4.80	5.44	0.40	1.00	0.50	1.20	0.50	0.90
FSMD100-60-2920R	2	6.73	7.98	4.80	5.44	0.40	1.70	0.50	1.20	0.50	0.90
FSMD125-2920	1	6.73	7.98	4.80	5.44	0.40	0.90	0.35	—	—	—
FSMD125-2920-R	2	6.73	7.98	4.80	5.44	0.40	0.90	0.50	1.20	0.50	0.90
FSMD150-2920	1	6.73	7.98	4.80	5.44	0.40	0.90	0.35	—	—	—
FSMD150-2920-R	2	6.73	7.98	4.80	5.44	0.40	0.90	0.50	1.20	0.50	0.90
FSMD185-2920	1	6.73	7.98	4.80	5.44	0.30	0.90	0.35	—	—	—
FSMD185-2920-R	2	6.73	7.98	4.80	5.44	0.30	0.90	0.50	1.20	0.50	0.90
FSMD200-2920	1	6.73	7.98	4.80	5.44	0.30	0.90	0.35	—	—	—
FSMD200-2920-R	2	6.73	7.98	4.80	5.44	0.30	0.90	0.50	1.20	0.50	0.90
FSMD200-24-2920-R	2	6.73	7.98	4.80	5.44	0.20	0.80	0.50	1.20	0.50	0.90
FSMD250-2920	1	6.73	7.98	4.80	5.44	0.30	0.90	0.35	—	—	—
FSMD250-2920-R	2	6.73	7.98	4.80	5.44	0.30	0.90	0.50	1.20	0.50	0.90
FSMD260-2920	1	6.73	7.98	4.80	5.44	0.30	0.90	0.35	—	—	—
FSMD260-2920-R	2	6.73	7.98	4.80	5.44	0.30	0.90	0.50	1.20	0.50	0.90
FSMD300-2920	1	6.73	7.98	4.80	5.44	0.40	0.90	0.35	—	—	—
FSMD300-2920-R	2	6.73	7.98	4.80	5.44	0.40	0.90	0.50	1.20	0.50	0.90
FSMD300-15-2920R	2	6.73	7.98	4.80	5.44	0.65	1.15	0.50	1.20	0.50	0.90

NOTE : Specification subject to change without notice.

 FUZETEC TECHNOLOGY CO., LTD.	NO.	PQ11-01E		
	Product Specification and Approval Sheet	Version	C0	Page

5. Thermal Derating Curve

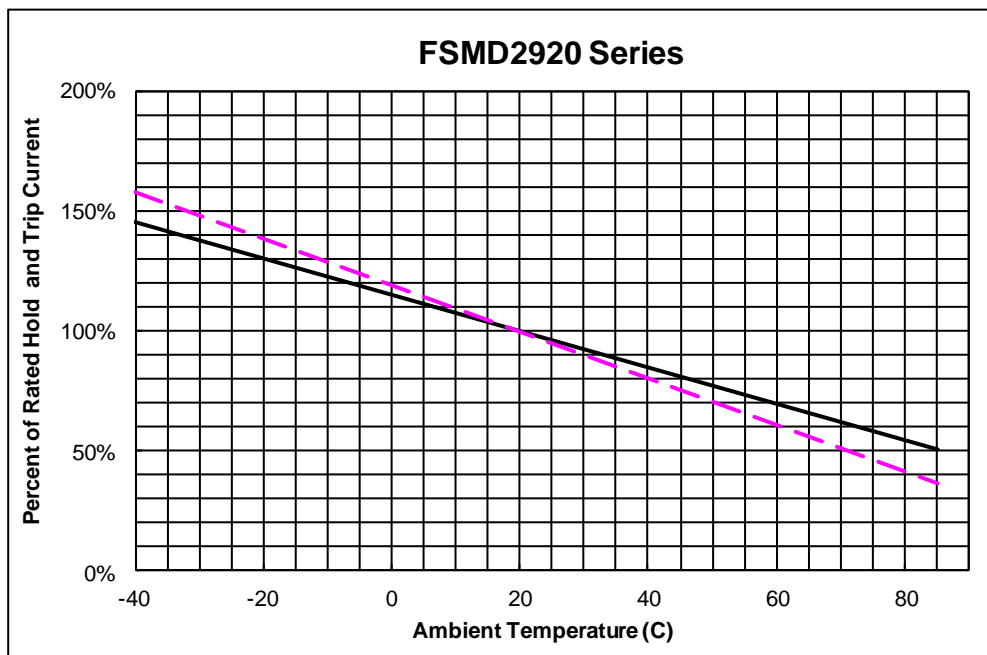


A= FSMD125-2920 ~
FSMD300-2920

B= FSMD030-2920 ~
FSMD100-2920

A
B

6. Typical Time-To-Trip at 23°C

- A = FSMD030-2920/-R
- B = FSMD050-2920/-R
- C = FSMD075-2920/-R
- 075-60-2920-R
- D = FSMD100-2920/-R
- 100-60-2920R
- E = FSMD125-2920/-R
- F = FSMD150-2920/-R
- G = FSMD185-2920/-R
- H = FSMD200-2920/-R
- 200-24-2920-R
- I = FSMD250-2920/-R
- J = FSMD260-2920/-R
- K = FSMD300-2920/-R
- 300-15-2920R

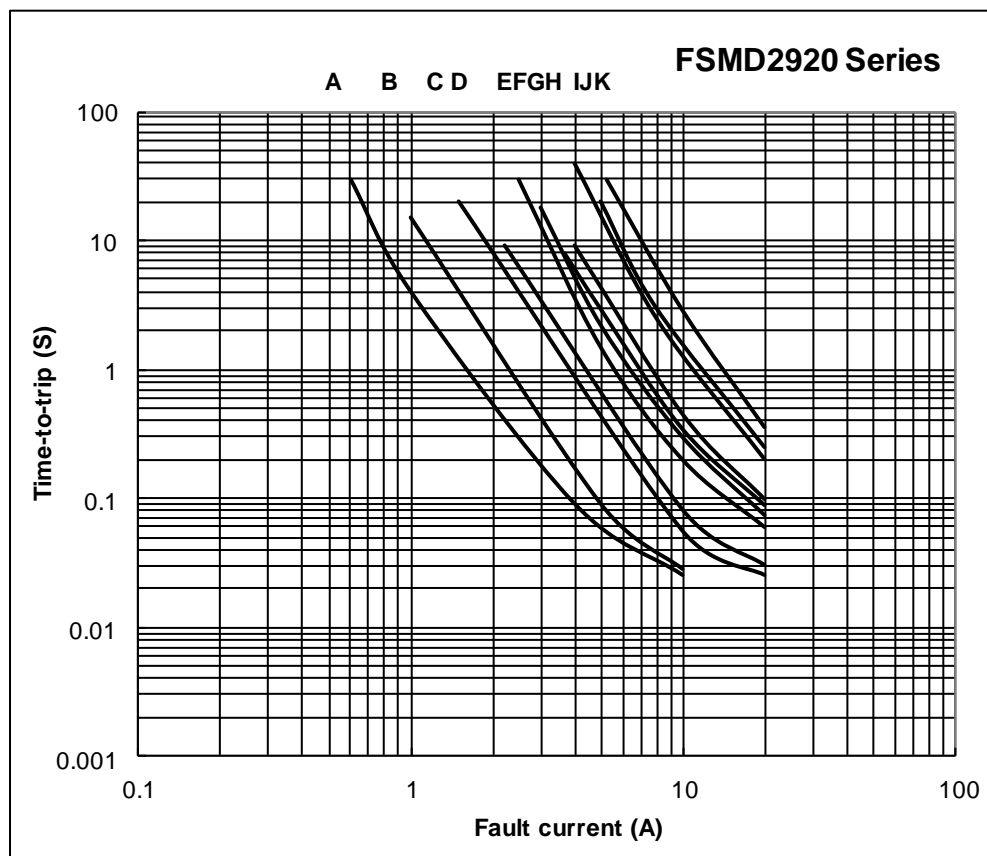

NOTE : Specification subject to change without notice.

 FUZETEC TECHNOLOGY CO., LTD.	NO.	PQ11-01E		
	Product Specification and Approval Sheet	Version	C0	Page


7. Material Specification


Terminal pad material : Pure Tin

Soldering characteristics: Meets EIA specification RS 186-9E, ANSI/J-std-002 Category 3



8. Part Numbering and Marking System



Part Numbering System

F S M D □ □ □ - 2920 / - R
 Current Rating

F S M D □ □ □ - □ □ - 2920 - R
 Voltage Rating
 Current Rating

Part Marking System

 Example
 Part Identification
 Fuzetec Logo

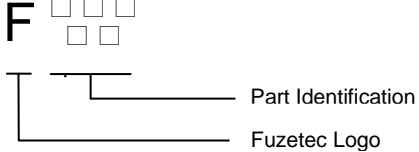 Example
 Part Identification
 Fuzetec Logo

Warning: -Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.



-PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.


-Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.

NOTE : Specification subject to change without notice.

 FUZETEC TECHNOLOGY CO., LTD.	NO.	PQ11-01E		
	Product Specification and Approval Sheet	Version	C0	Page

9. Pad Layouts 、 Solder Reflow and Rework Recommendations

The dimension in the table below provide the recommended pad layout for each FSMD2920 device



Pad dimensions (millimeters)			
Device	A Nominal	B Nominal	C Nominal
All 2920 Series	5.1	2.3	5.6

Profile Feature	Pb-Free Assembly
Average Ramp-Up Rate (T_{max} to T_p)	3 °C/second max.
Preheat :	
Temperature Min (T _{min})	150 °C
Temperature Max (T _{max})	200 °C
Time (t _{min} to t _{max})	60-180 seconds
Time maintained above:	
Temperature(T _L)	217 °C
Time (t _L)	60-150 seconds
Peak/Classification Temperature(T_p) :	260 °C
Time within 5°C of actual Peak :	
Temperature (t _p)	20-40 seconds
Ramp-Down Rate :	6 °C/second max.
Time 25 °C to Peak Temperature :	8 minutes max.


Solder reflow

- ※ Due to “Lead Free” nature, Temperature and Dwelling time for the soldering zone is higher than those for Regular. This may cause damage to other components.
1. Recommended max past thickness > 0.25mm.
 2. Devices can be cleaned using standard methods and aqueous solvent.
 3. Rework use standard industry practices.
 4. Storage Environment : < 30°C / 60%RH

Caution:

1. If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.
2. Devices are not designed to be wave soldered to the bottom side of the board.

Note 1: All temperatures refer to of the package, measured on the package body surface.

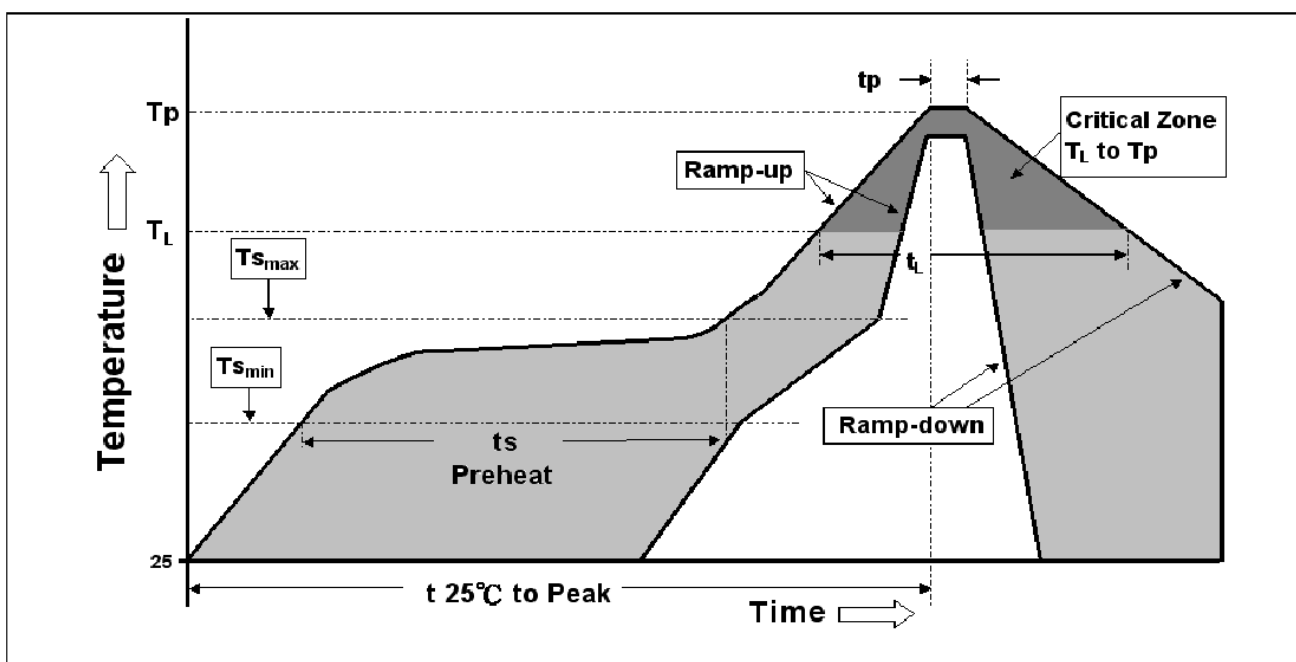

NOTE : Specification subject to change without notice.