

NTC Thermistor : TSM Series

SMD Type NTC Thermistor for Temperature Sensing

■ Features


1. RoHS & Halogen Free (HF) compliant
2. EIA size: 0201, 0402, 0603, 0805
3. Highly reliable structure
4. Operating temperature range: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
5. Wide resistance range
6. Cost effective
7. Agency recognition: UL / cUL / TUV/ CQC




■ Recommended Applications

1. Battery pack
2. Motherboard, notebook and personal computer device
3. Liquid crystal display
4. Cellular phone
5. Bluetooth headset
6. Wi-Fi module

■ Part Number Code

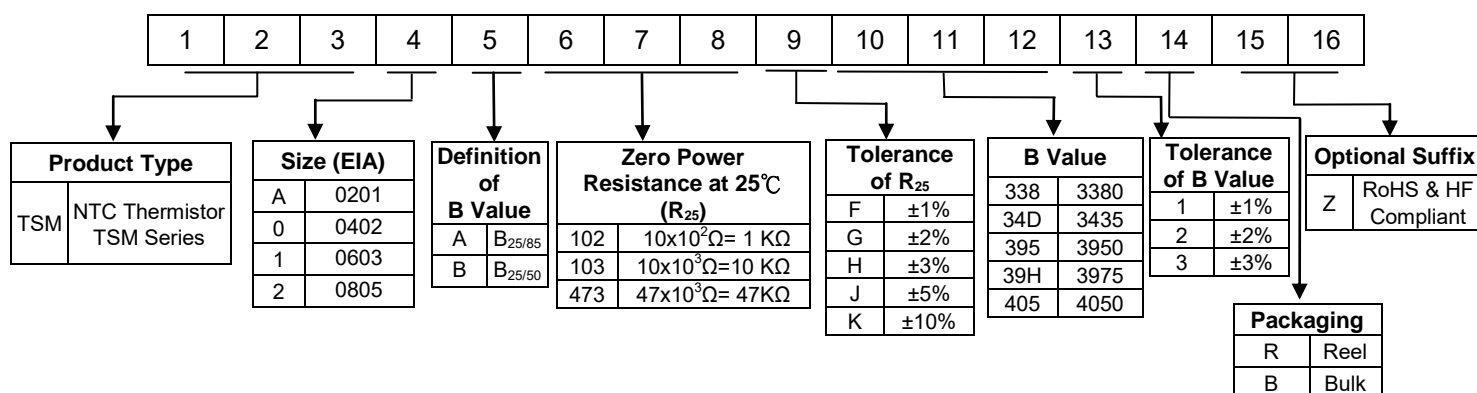

■ Structure and Dimensions

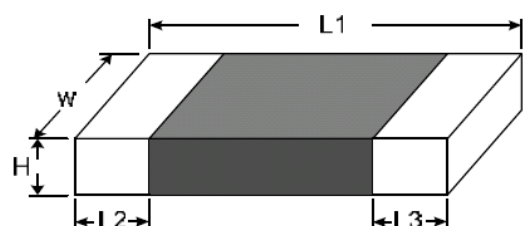

(Unit: mm)

Part No.	Size (EIA)	L1	W	H max.	L2 & L3
TSM A	0201	0.60±0.05	0.30±0.05	0.35	0.15±0.05
TSM 0	0402	1.00±0.15	0.50±0.10	0.60	0.20±0.10
TSM 1	0603	1.60±0.15	0.80±0.15	0.95	0.40±0.15
TSM 2	0805	2.00±0.20	1.25±0.20	1.00	0.40±0.20

SMD Type NTC Thermistor for Temperature Sensing

Electrical Characteristics

Part No.	Size (EIA)	Zero Power Resistance at 25°C	Tolerance of R25	B Value		Tolerance of B value	Max. Power Dissipation at 25°C	Dissipation Factor	Thermal Time Constant	Operating Temperature Range	Safety Approvals										
		R ₂₅ (KΩ)	(±%)	(K)	(±%)	P _{max} (mW)	δ(mW/°C)	τ (Sec.)	T _L ~T _U (°C)	UL cUL	TUV	CQC									
TSMAB103□338*	0201	10	1, 2, 3, 5, 10	25/50	3380	1, 2, 3	140	Approx. 1.4	Approx. 1.2	-40 ~ +125	√	√	√								
TSMAB683□425*		68			4250						√	√	√								
TSMAB104□425*		100			4250						√	√	√								
TSM0A103□34D*	0402	10	1, 2, 3, 5, 10	25/85	3435	1, 2, 3	170	Approx. 1.7	Approx. 2.0	-40 ~ +125	√	√	√								
TSM0A103□395*		10			3950						√	√	√								
TSM0A223□395*		22			3950						√	√	√								
TSM0A333□405*		33			4050						√	√	√								
TSM0A683□410*		68			4100						√	√	√								
TSM0A104□405*		100			4050						√	√	√								
TSM0A104□436*		100			4360						√	√	√								
TSM0B103□338*		10		3380	25/50						3380	√	√	√							
TSM0B473□405*		47		4050							√	√	√								
TSM0B104□354*		100		3540							√	√	√								
TSM0B104□425*		100		4250							√	√	√								
TSM0B104□480*		100		4800							√	√	√								
TSM0B224□470*		220		4700							√	√	√								
TSM0B474□470*		470		4700							3	100	√	√	√						
TSM1A102□320*		0603		1	1, 2, 3, 5, 10						25/85	3200	1, 2, 3	210	Approx. 2.1	Approx. 3.1	-40~+125	√	√	√	
TSM1A202□340*				2								3400						√	√	√	
TSM1A472□34D*				4.7								3435						√	√	√	
TSM1A472□370*	4.7		3700	√		√	√														
TSM1A502□34D*	5		3435	√		√	√														
TSM1A502□385*	5		3850	√		√	√														
TSM1A682□34D*	6.8		3435	√		√	√														
TSM1A682□395*	6.8		3950	√		√	√														
TSM1A103□34D*	10		3435	√		√	√														
TSM1A103□39H*	10		3975	√		√	√														
TSM1A103□430*	10		4300	3		100	√	√	√												
TSM1A223□392*	22		3920	1, 2, 3, 5, 10		25/50	3920	1, 2, 3	210	Approx. 2.1		Approx. 3.1						-40~+125	√	√	√
TSM1A333□392*	33		3920				√												√	√	
TSM1A473□39H*	47		3975				√												√	√	
TSM1A683□39H*	68		3975				√												√	√	
TSM1A104□405*	100		4050				√												√	√	
TSM1A104□436*	100		4360				√												√	√	
TSM1A154□406*	150		4060		√		√				√										
TSM1A204□410*	200		4100		√		√				√										
TSM1A474□415*	470		4150		√		√				√										
TSM1B221□350*	0.22		3500		5, 10		25/50				3500		1, 2, 3, 5, 10	210	Approx. 2.1	Approx. 3.1	-40~+125		√	√	√
TSM1B222□395*	2.2		3950	3		100		√	√	√											
TSM1B472□425*	4.7		4250	√		√		√													
TSM1B332□365*	3.3		3650	√		√		√													
TSM1B103□338*	10		3380	√		√		√													
TSM1B103□420*	10		4200	√		√		√													
TSM1B473□425*	47		4250	√		√		√													
TSM1B104□355*	100	3550	√	√		√															
TSM1B104□425*	100	4250	√	√		√															
TSM1B224□460*	220	4600	√	√		√															

Note 1: □ = Tolerance of R₂₅
* = Tolerance of B value

Note 2: UL&cUL File No. E138827 / TUV File No. R 50167657 / CQC File No.12001080962

Note 3: Special specifications are available upon request


Part No.	Size (EIA)	Zero Power Resistance at 25°C	Tolerance of R25	B Value		Max. Power Dissipation at 25°C	Dissipation Factor	Thermal Time Constant	Operating Temperature Range	Safety Approvals						
		R ₂₅ (KΩ)	(±%)	(K)	(±%)	P _{max} (mW)				τ (Sec.)	T _L ~T _U (°C)	UL cUL	TUV	CQC		
TSM2A102□34D*	0805	1	1, 2, 3, 5, 10	25/85	3435	1, 2, 3	240	Approx. 2.4	Approx. 5.4	-40~+125	√	√	√			
TSM2A222□398*		2.2	5,10		3980	3	100				√	√	√			
TSM2A 502□34D*		5	1, 2, 3, 5, 10		3435	1, 2, 3	240				Approx. 2.4	Approx. 5.4	-40~+125	√	√	√
TSM2A682□34D*		6.8			3435									√	√	√
TSM2A103□34D*		10			3435									√	√	√
TSM2A103□363*		10			3630									√	√	√
TSM2A103□395*		10			3950									√	√	√
TSM2A223□392*		22			3920									√	√	√
TSM2A473□39H*		47			3975									√	√	√
TSM2A104□405*		100			4050									√	√	√
TSM2A104□455*		100		4550	√									√	√	
TSM2A684□450*		680		5, 10	4500									3	100	√
TSM2B223□395*		22	1, 2, 3, 5, 10	3950	1, 2, 3	240	Approx. 2.4				Approx. 5.4	-40~+125	√	√	√	
TSM2B104□425*		100	25/50	4250									√	√	√	

Note 1: □ = Tolerance of R₂₅
 * = Tolerance of B value

Note 2: UL&cUL File No. E138827 / TUV File No. R 50167657 / CQC File No.12001080962

Note 3: Special specifications are available upon request

■ Max. Power Dissipation Derating Curve

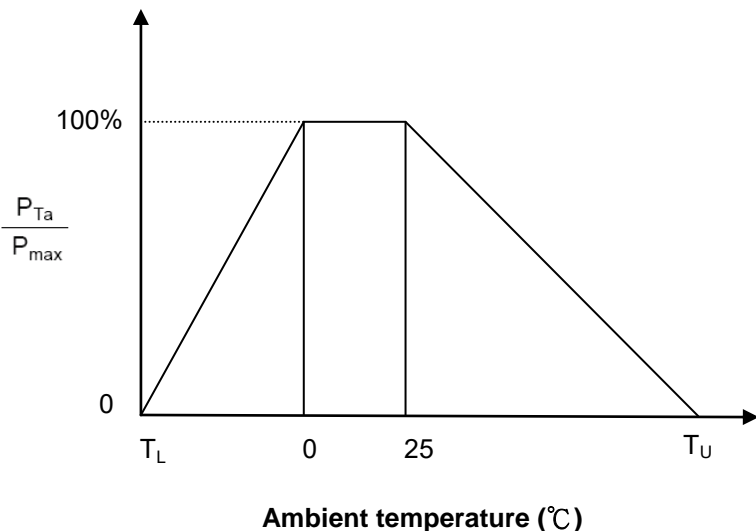

T_U : Maximum operating temperature (°C)

T_L : Minimum operating temperature (°C)

For example:

Ambient temperature (T_a) = 55°C


Maximum operating temperature (T_U) = 125°C

$$P_{Ta} = (T_U - T_a) / (T_U - 25) \times P_{max} = 70\% P_{max}$$


SMD Type NTC Thermistor for Temperature Sensing

R-T Characteristic Curves


TSMAB103 □ 338* ~ TSMAB104 □ 425*

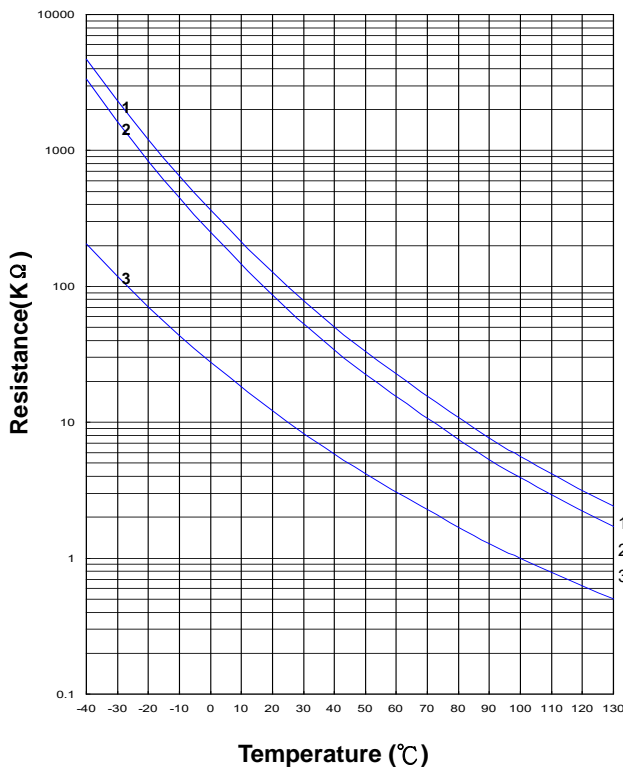


TSM0A103 □ 34D* ~ TSM0B474 □ 470*

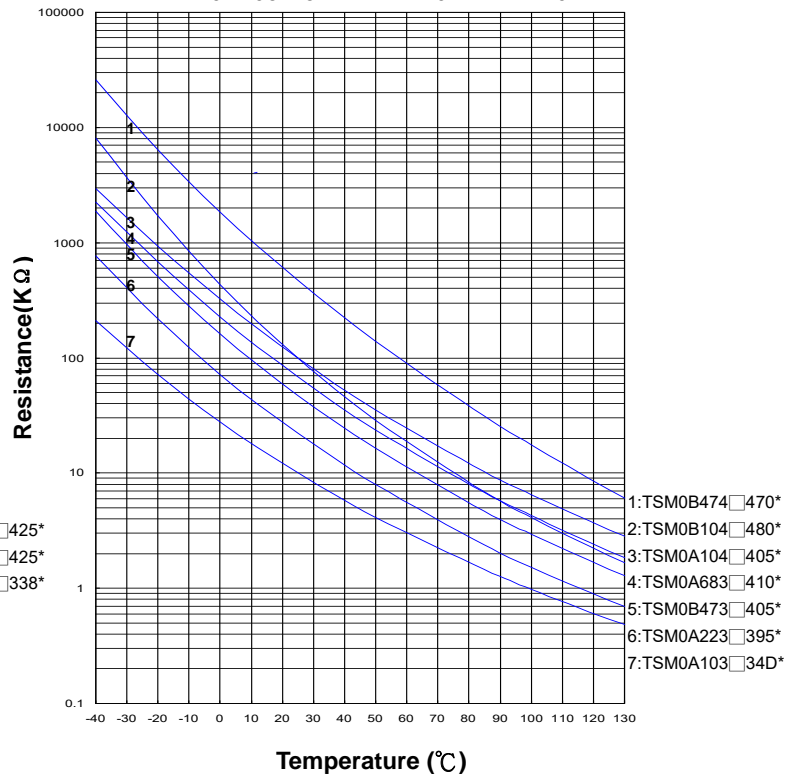

TSM0B103 □ 34D* ~ TSM0B224 □ 470*

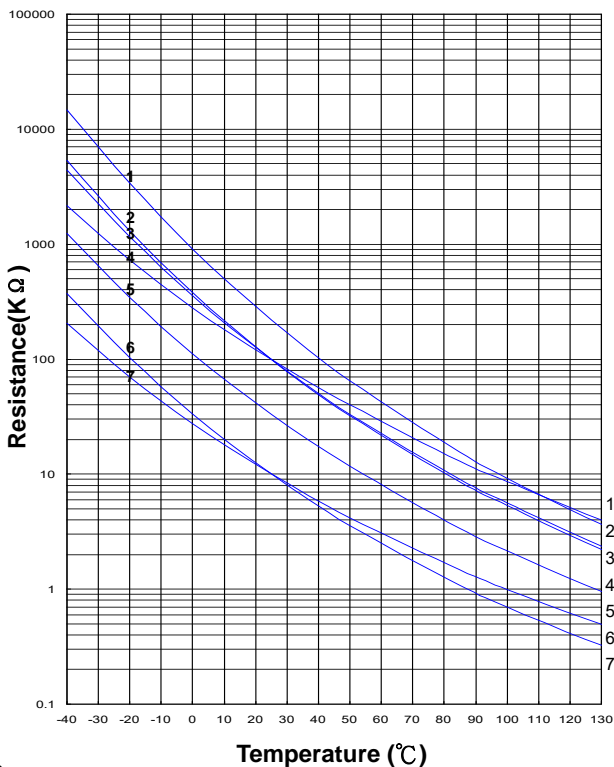

TSM1A102 □ 320* ~ TSM1A204 □ 410*

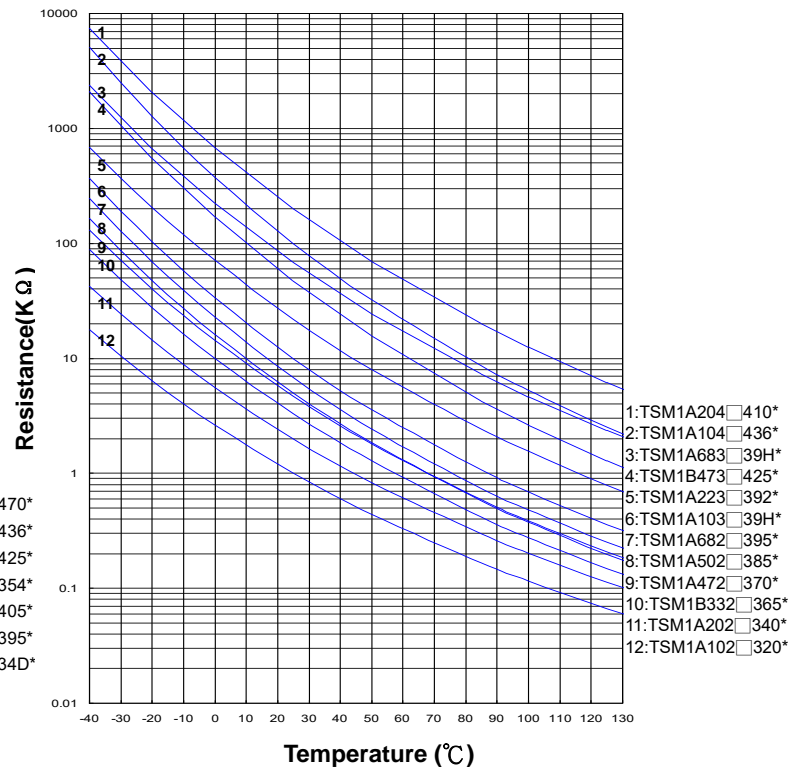


NTC Thermistor : TSM Series



SMD Type NTC Thermistor for Temperature Sensing


TSM1A472□34D* ~ TSM1A474□415*

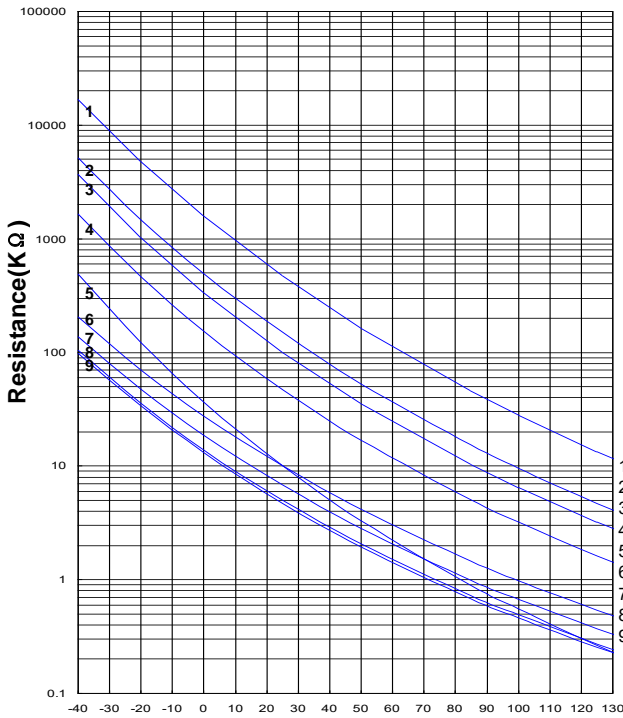

- 1:TSM1A474□415*
- 2:TSM1A154□406*
- 3:TSM1A104□405*
- 4:TSM1A473□39H*
- 5:TSM1A103□430*
- 6:TSM1A103□34D*
- 7:TSM1A682□34D*
- 8:TSM1A502□34D*
- 9:TSM1A472□34D*

Temperature (°C)


TSM1B221□350* ~ TSM1B224□460*

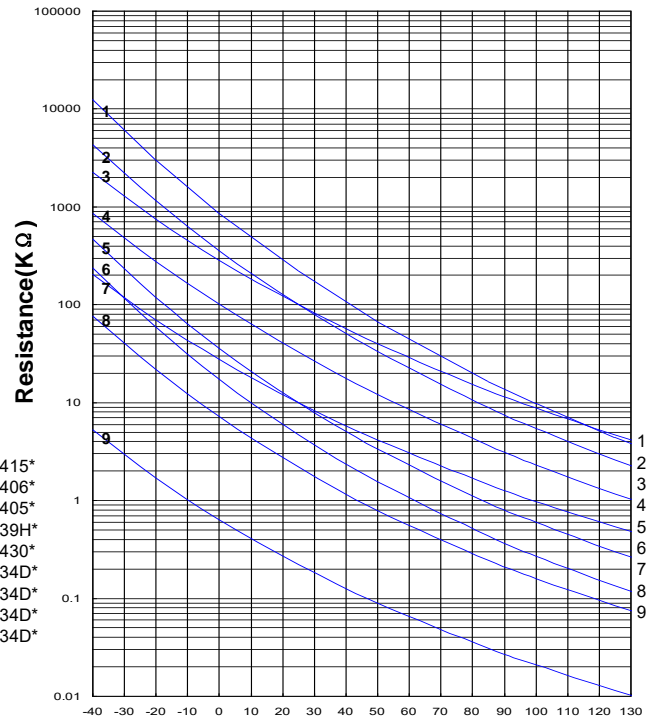

- 1:TSM1B224□460*
- 2:TSM1B104□425*
- 3:TSM1B104□355*
- 4:TSM1A333□392*
- 5:TSM1B103□420*
- 6:TSM1B103□338*
- 7:TSM1B472□425*
- 8:TSM1B222□395*
- 9:TSM1B221□350*

Temperature (°C)


TSM2A102□320* ~ TSM2A684□450*

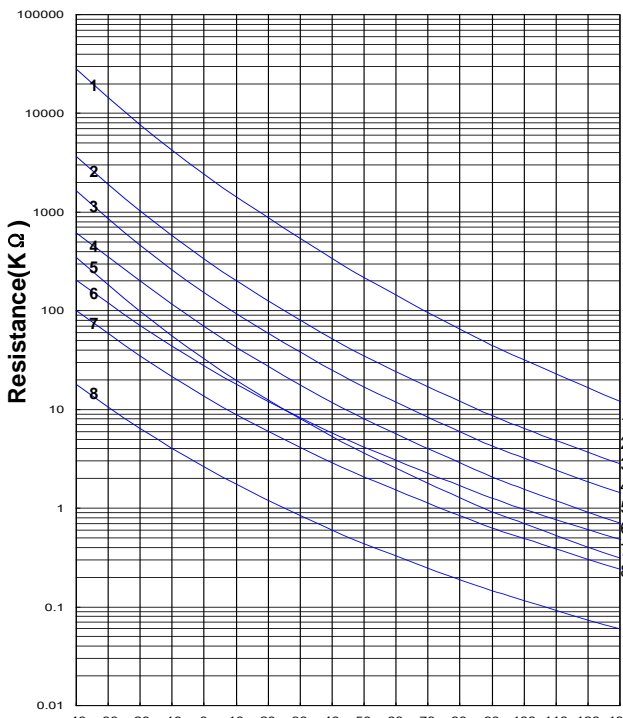

- 1:TSM2A684□450*
- 2:TSM2A104□405*
- 3:TSM2A473□39H*
- 4:TSM2A223□392*
- 5:TSM2A103□395*
- 6:TSM2A103□34D*
- 7:TSM2A502□34D*
- 8:TSM2A102□320*

Temperature (°C)

TSM2A222□398* ~ TSM2A104□455*

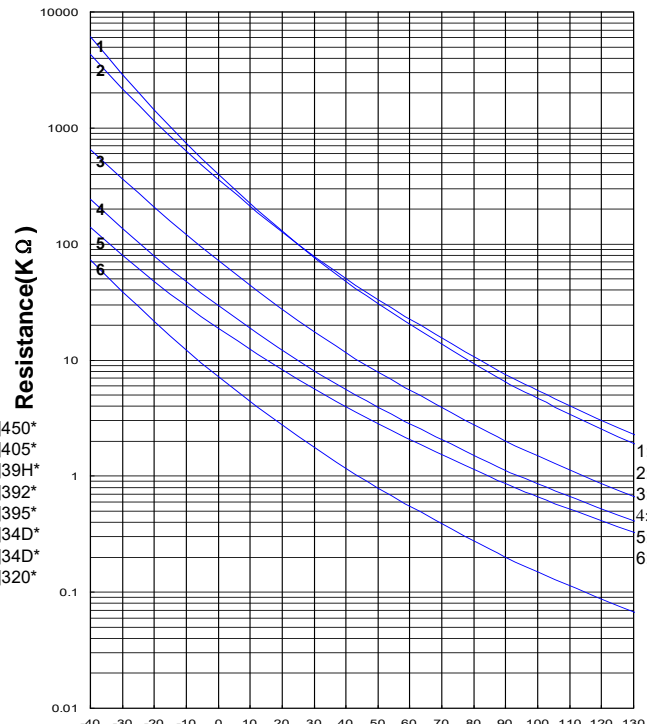


- 1:TSM2A104□455*
- 2:TSM2B104□425*
- 3:TSM2A223□392*
- 4:TSM2A103□363*
- 5:TSM2A682□34D*
- 6:TSM2A222□398*

Temperature (°C)

■ Soldering Recommendation

● IR-Reflow Soldering Profile

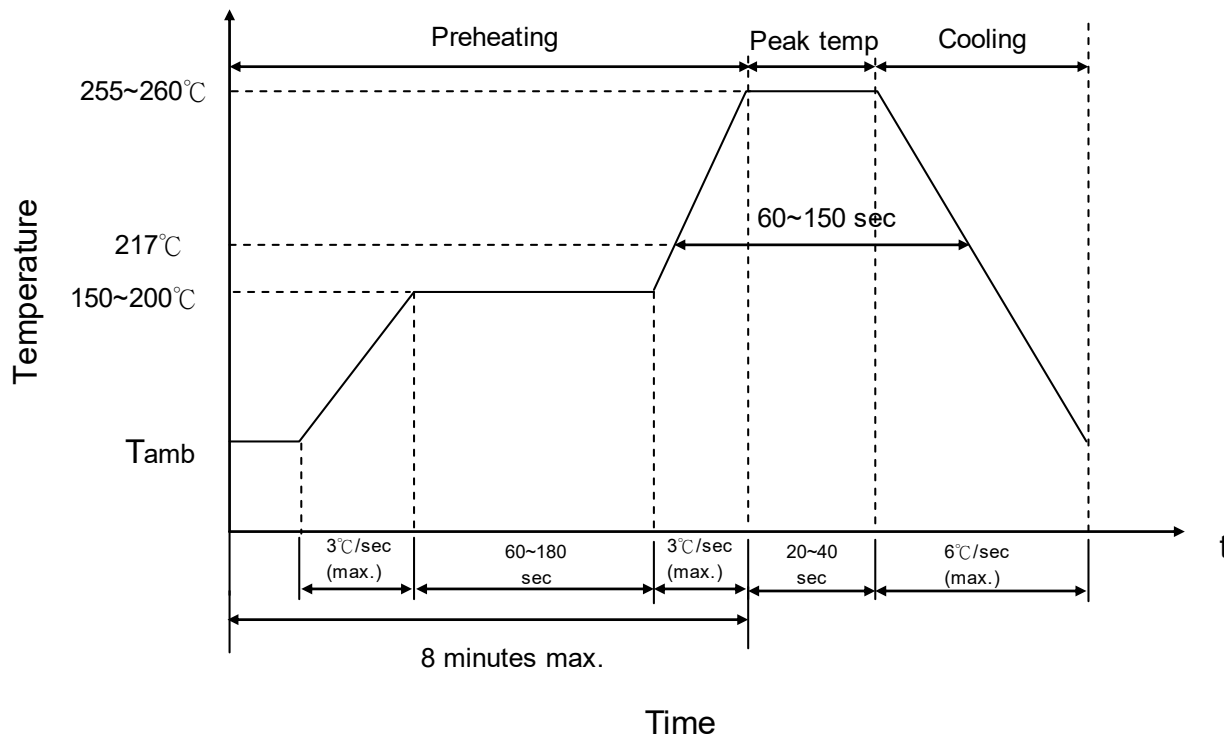


● Recommended Reworking Conditions with Soldering Iron

Item	Conditions
Temperature of Soldering Iron-tip	360°C (max.)
Soldering Time	3 sec. (max.)
Diameter of Soldering Iron-tip	$\Phi 3\text{mm}$ (max.)
Caution: Please do not touch the component surface with soldering iron directly to avoid its damage.	

SMD Type NTC Thermistor for Temperature Sensing


■ Recommended Soldering Pad Dimensions




Size (EIA)	Z (mm)	G (mm)	X (mm)	Y (mm)
0201	0.8	0.3	0.3	0.25
0402	1.7	0.5	0.6	0.6
0603	3.0	1.0	1.0	1.0
0805	3.4	1.0	1.4	1.2

SMD Type NTC Thermistor for Temperature Sensing

■ Notice of Soldering and Mounting on PC Board

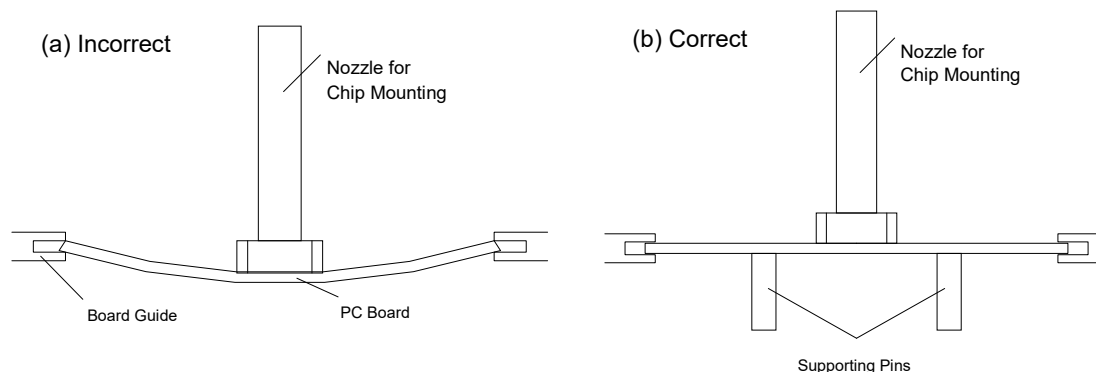


For mounting SMDs on a PC board, supporting pin is suggested for use (refer to figure b) to avoid cracks caused by external stress (refer to figure a).

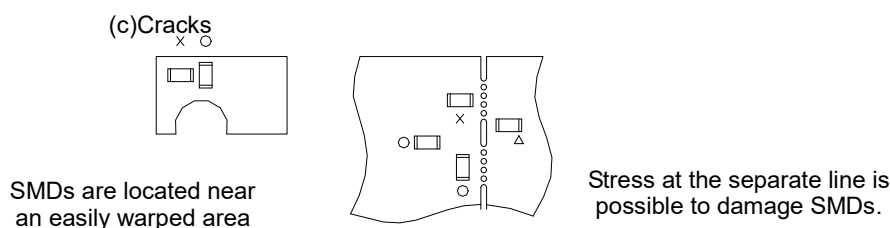

If circuit bending is needed for PC board design, please refer to figure (c) for mounting positions to avoid cracks caused by stress imposed on the product. O means better, Δ is acceptable, and X is worst.

(d) Component Orientation

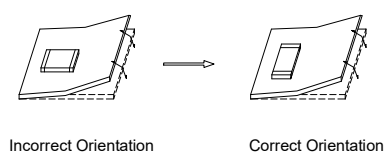


Locate SMDs horizontally to the direction that stress acts

During circuit bending, please locate SMDs horizontally to the direction in which stress act to avoid its cracks (refer to figure d).

SMD Type NTC Thermistor for Temperature Sensing


■ Reliability

Item	Standard	Test conditions / Methods	Specifications															
Bending Strength	IEC 60068-2-21	Warp : 2mm for 0402,0603 and 0805 1mm for 0201 Speed < 0.5mm/sec. Duration: 10 sec. on PCB 	No visible damage $ \Delta R_{25}/R_{25} \leq 5\%$															
Solderability	IEC 60068-2-58	245 ± 5°C, 3 ± 0.3 sec.	At least 95% of terminal electrode is covered by new solder															
Resistance to Soldering Heat	IEC 60068-2-58	260 ± 5°C, 10 ± 1 sec.	No visible damage $ \Delta R_{25}/R_{25} \leq 3\%$															
High Temperature Storage	IEC 60068-2-2	125 ± 5°C, 1000 ± 24 hrs	No visible damage $ \Delta R_{25}/R_{25} \leq 5\%$															
Damp Heat, Steady State	IEC 60068-2-78	40 ± 2°C, 90~95% RH, 1000 ± 24 hrs	No visible damage $ \Delta R_{25}/R_{25} \leq 3\%$															
Rapid Change of Temperature	IEC 60068-2-14	The conditions shown below shall be repeated 5 cycles on PCB. <table border="1" data-bbox="517 913 1204 1176"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> <th>Period (minutes)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-40 ± 5</td> <td>30 ± 3</td> </tr> <tr> <td>2</td> <td>Room temperature</td> <td>5 ± 3</td> </tr> <tr> <td>3</td> <td>125 ± 5</td> <td>30 ± 3</td> </tr> <tr> <td>4</td> <td>Room temperature</td> <td>5 ± 3</td> </tr> </tbody> </table>	Step	Temperature (°C)	Period (minutes)	1	-40 ± 5	30 ± 3	2	Room temperature	5 ± 3	3	125 ± 5	30 ± 3	4	Room temperature	5 ± 3	No visible damage $ \Delta R_{25}/R_{25} \leq 3\%$
Step	Temperature (°C)	Period (minutes)																
1	-40 ± 5	30 ± 3																
2	Room temperature	5 ± 3																
3	125 ± 5	30 ± 3																
4	Room temperature	5 ± 3																
Max. Power Dissipation	IEC 60539-1 4.26.3	25 ± 5°C, Pmax., 1000 ± 24 hrs	No visible damage $ \Delta R_{25}/R_{25} \leq 5\%$															

SMD Type NTC Thermistor for Temperature Sensing


■ Packaging

● Taping Specification

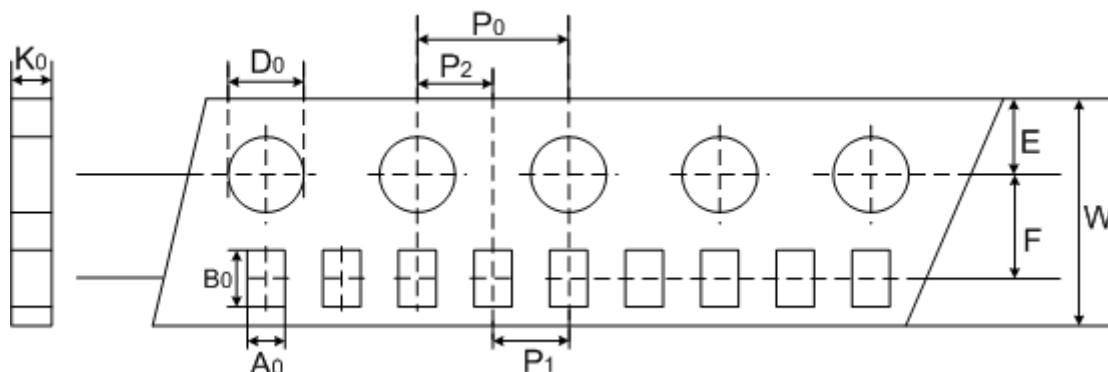

(Unit: mm)

Index Size	A_0	B_0	W	E	F	P_1	P_2	P_0	D_0	K_0
0201	± 0.05	± 0.12	± 0.2	± 0.1	± 0.05	± 0.1	± 0.05	± 0.1	± 0.1	± 0.1
0402	0.62	1.12	8	1.75	3.5	2	2	4	1.55	0.60

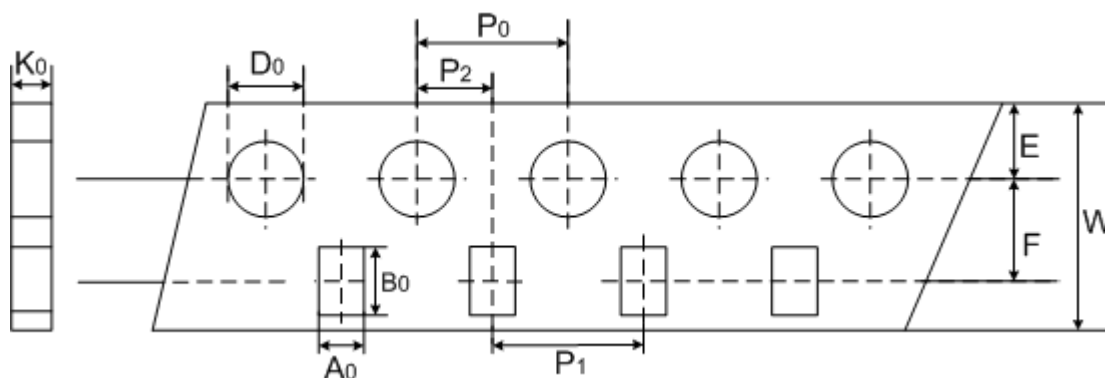


(Unit: mm)

Index Size	A_0	B_0	W	E	F	P_1	P_2	P_0	D_0	K_0
0603	± 0.2	± 0.2	± 0.2	± 0.1	± 0.05	± 0.1	± 0.05	± 0.1	± 0.1	± 0.1
0805	1.5	2.3	8	1.75	3.5	4	2	4	1.55	1.0

SMD Type NTC Thermistor for Temperature Sensing

■ Quantity

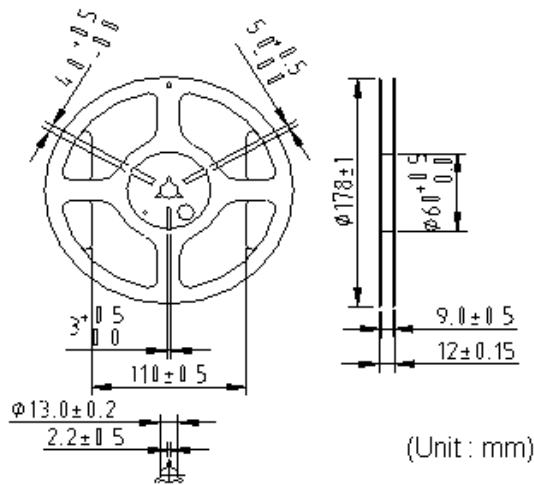

Size (EIA)	Quantity (pcs/reel)
0201	15,000
0402	10,000
0603	4,000
0805	3,500

■ Warehouse Storage Conditions of Products

- Storage Conditions :
 1. Storage Temperature: -10°C ~ +40°C
 2. Relative Humidity: ≤ 75%RH
 3. Keep away from corrosive atmosphere and sunlight.
- Period of Storage : 1 year