


Thermal Link A-3A-F Series

3A Series





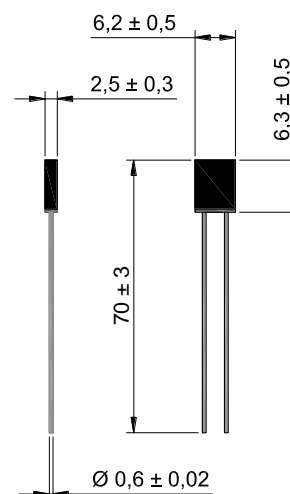


Key Features

- Plastic case
- Non-resettable
- High accuracy of function temperature
- RoHS & REACH compliant

Dimensions



Specification

Model	T _f	Fusing Temp.	T _h	T _m	I _r	U _r							
	(°C)	(°C)	(°C)	(°C)	(A)	(V)	UL recognized	cUL recognized	VDE	PSE	CCC	KTL	RoHS REACH
A0-3A-F	84	82±2	65	203	3	AC 250	●	●	●	●	●	●	●
A1-3A-F	102	98±2	80	203	3	AC 250	●	●	●	●	●	●	●
A2-3A-F	115	112±3	95	203	3	AC 250	●	●	●	●	●	●	●
A3-3A-F	125	120±3	105	203	3	AC 250	●	●	●	●	●	●	●
A4-3A-F	130	126±2	107	203	3	AC 250	●	●	●	●	●	●	●
A5-3A-F	135	131±3	115	203	3	AC 250	●	●	●	●	●	●	●
A7-3A-F	138	135±2	115	203	3	AC 250	●	●	●	●	●	●	●
A12-3A-F	145	140±2	126	203	3	AC 250	●	●	●	●	●	●	●
A8-3A-F	150	145±3	128	203	3	AC 250	●	●	●	●	●	●	●