

Thermal Link B Series


3A Series

Key Features

- Ceramic case
- Non-resettable
- High accuracy of function temperature
- RoHS & REACH compliant

Customization

- Other temperature can be customized
- The length of lead wires can be customized as required
- Lead wires can be insulated
- Taping packing available

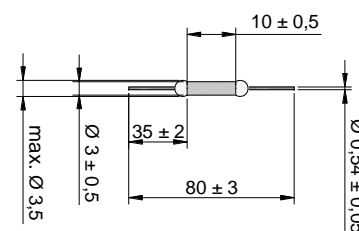

Specification

Model	T _f	Fusing Temp.	T _h	T _m	I _r	U _r							
	(°C)	(°C)	(°C)	(°C)	(A)	(V)	UL	cUL	TÜV	PSE	CCC	KTL	RoHS REACH
B0	76	73±2	53	200	3	AC 250			•	•	•	•	•
						AC 125	•	•					•
						DC 50	•	•					•
B18	86	81±2	61	200	3	AC 250			•	•	•	•	•
						AC 125	•	•					•
						DC 50	•	•					•
B21	97	93±2	70	200	3	AC 125	•	•		•			•
						DC 50	•	•					•
B1	102	98±2	79	200	3	AC 250			•	•	•	•	•
						AC 125	•	•					•
						DC 50	•	•					•
B2	115	111±2	91	200	3	AC 250	•	•	•	•	•	•	•
						DC 50	•	•					•
B3	125	121±2	100	200	3	AC 125	•	•	•	•	•	•	•
						DC 50	•	•					•
B4	130	125±2	106	200	3	AC 125	•	•	•	•	•	•	•
						DC 50	•	•					•
B8	133	130±2	111	200	3	AC 125	•	•	•	•	•	•	•
						DC 50	•	•					•
B5	135	130±2	111	200	3	AC 125	•	•	•	•	•	•	•
						DC 50	•	•					•
B9	136	131±2	112	200	3	AC 125	•	•	•	•	•	•	•
						DC 50	•	•					•
B13	139	135±2	115	200	3	AC 125	•	•	•	•	•	•	•
						DC 50	•	•					•
B6	145	140±2	121	200	3	AC 125	•	•	•	•	•	•	•
						DC 50	•	•					•
B7	150	145±2	126	200	3	AC 125	•	•	•	•	•	•	•
						DC 50	•	•					•
B16	160	154±2	135	200	3	AC 250			•	•	•		•
						DC 60			•				•
B32	205	199±3	169	250	3	AC 250			•		•		•
						AC 125	•	•					•
						DC 60	•	•	•				•
B31	221	218±2	188	250	3	AC 250	•	•	•		•		•
						AC 125	•	•					•
						DC 60	•	•	•				•

Changes and errors excepted