

## Thermal Link F Series


## 1A Series

### Key Features







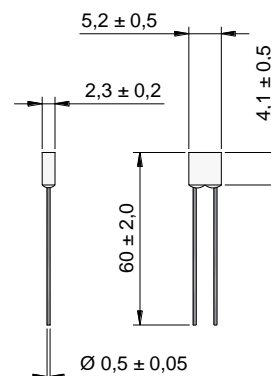

- Transparent plastic case
- Non-resettable
- High accuracy of function temperature
- RoHS & REACH compliant

### Customization

- Other temperature can be customized
- The length of lead wires can be customized as required
- Lead wires can be insulated
- Tinned copper wires or copper plated steel wires



### Specification

Model	T <sub>f</sub>	Fusing Temp.	T <sub>h</sub>	T <sub>m</sub>	I <sub>r</sub>	U <sub>r</sub>								
	(°C)	(°C)	(°C)	(°C)	(A)	(V)	UL recognized	cUL recognized	PSE	VDE	TÜV	CCC	KTL	RoHS REACH
F0	76	73±2	53	200	1	AC 250	●	●	●			●		●
F18	86	81±2	61	200	1	AC 250	●	●	●		●	●		●
F1	102	98±2	79	200	1	AC 250	●	●	●	●	●	●	●	●
F2	115	111±2	91	200	1	AC 250	●	●	●	●	●	●	●	●
F3	125	121±2	100	200	1	AC 250	●	●	●	●	●	●	●	●
F4	130	125±2	106	200	1	AC 250	●	●	●	●	●	●	●	●
F8	133	130±2	111	200	1	AC 250	●	●	●		●	●	●	●
F6	145	140±2	121	200	1	AC 250	●	●	●		●			●
F7	150	145±2	126	200	1	AC 250	●	●	●	●	●	●	●	●
F16	160	154±2	135	200	1	AC 250			●		●	●		●