

Thermal Link G Series


40A Series

Key Features


- Transparent plastic case
- Non-resettable
- High accuracy of function temperature
- High surge capacity
- RoHS & REACH compliant

Customization

- Other temperature can be customized
- The length of lead wires can be customized as required

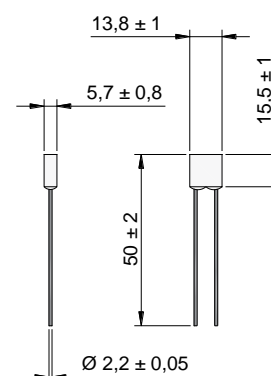

Specification

Model	T_f	Fusing Temp.	T_h	T_m	I_r	U_r	I_n 8/20 μ s (15 Times)	I_{max} 8/20 μ s (1 Time)	
	(°C)	(°C)	(°C)	(°C)	(A)	(V)	(kA)	(kA)	RoHS REACH
G102	102	99±2	61	160	40	AC 250	30	60	●
G115	115	112±2	74	160	40	AC 250	30	60	●
G125	125	122±2	84	160	40	AC 250	30	60	●
G130	130	126±2	88	160	40	AC 250	30	60	●
G136	136	132±2	94	160	40	AC 250	30	60	●
G150	150	146±2	108	160	40	AC 250	30	60	●