

Thermal Link HC Series


5A Series

Key Features

- Plastic case
- Non-resettable
- High accuracy of function temperature
- High operating voltage
- RoHS & REACH compliant

Customization

- Other temperature can be customized
- The length of lead wires can be customized as required

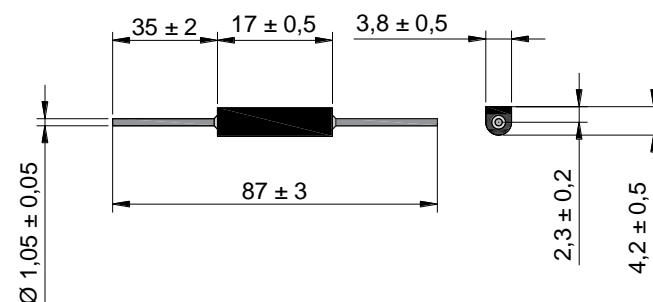

Specification

Model	T_f	Fusing Temp.	T_h	T_m	I_r	U_r	I_n 8/20 μ s (15 Times)	I_{max} 8/20 μ s (1 Time)	
	(°C)	(°C)	(°C)	(°C)	(A)	(V)	(kA)	(kA)	
HC0	76	73±2	43	200	5	AC 690	2	4	●
HC18	86	81±2	51	200	5	AC 690	2	4	●
HC1	102	98±2	72	200	5	AC 690	3	6	●
HC2	115	111±2	85	200	5	AC 690	3	6	●
HC3	125	121±2	95	200	5	AC 690	3	6	●
HC4	130	125±2	100	200	5	AC 690	3	6	●
HC5	135	130±2	105	200	5	AC 690	3	6	●
HC6	145	140±2	115	200	5	AC 690	3	6	●
HC9	136	131±2	106	200	5	AC 690	3	6	●
HC7	150	145±2	120	200	5	AC 690	3	6	●