

Thermal Link HP Series

10A Series

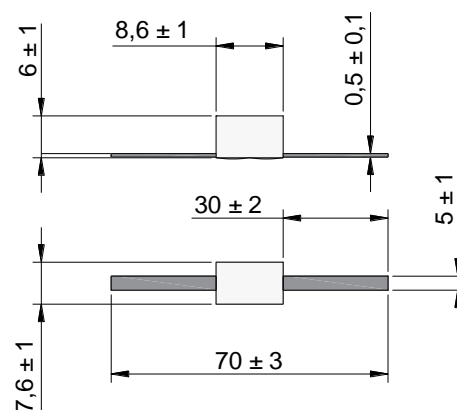
Key Features

- Ceramic case
- Flat leads
- Non-resettable
- High accuracy of function temperature
- High operating voltage
- RoHS & REACH compliant






Customization

- Other temperature can be customized
- The length of lead wires can be customized

Dimensions



Specification

Model	T _r	Fusing Temp.	T _h	T _m	I _r	U _r					
	(°C)	(°C)	(°C)	(°C)	(A)	(V)	UL	cUL	CCC	TÜV	RoHS REACH
HP125	125	121±2	90	250	10	AC 500	•	•	•	•	•
						DC 200	•	•	•	•	•
HP136	136	131±2	106	250	10	AC 500	•	•	•	•	•
						DC 200	•	•	•	•	•
HP145	145	140±2	112	250	10	AC 500	•	•	•	•	•
						DC 200	•	•	•	•	•