

## Thermal Link HR Series

## 15A Series


### Key Features

- Plastic case
- Non-resettable
- High accuracy of function temperature
- High operating voltage
- RoHS & REACH compliant


### Customization

- Other temperature can be customized
- The length of lead wires can be customized as required

### Dimensions

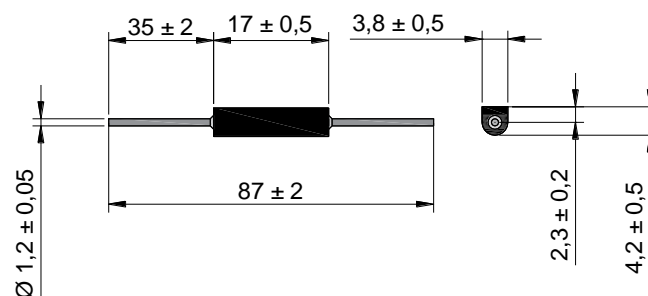

### Specification

| Model | $T_f$ | Fusing Temp. | $T_h$ | $T_m$ | $I_r$ | $U_r$  | $I_n$<br>8/20 $\mu$ s<br>(15 Times) | $I_{max}$<br>8/20 $\mu$ s<br>(1 Time) |  |
|-------|-------|--------------|-------|-------|-------|--------|-------------------------------------|---------------------------------------|---|
|       | (°C)  | (°C)         | (°C)  | (°C)  | (A)   | (V)    | (kA)                                | (kA)                                  |   |
| HR0   | 76    | 73±2         | 43    | 200   | 15    | AC 500 | 5                                   | 10                                    | ●   |
| HR18  | 86    | 81±2         | 51    | 200   | 15    | AC 500 | 5                                   | 10                                    | ●   |
| HR1   | 102   | 98±2         | 72    | 200   | 15    | AC 500 | 6                                   | 12                                    | ●   |
| HR2   | 115   | 111±2        | 85    | 200   | 15    | AC 500 | 6                                   | 12                                    | ●   |
| HR3   | 125   | 121±2        | 95    | 200   | 15    | AC 500 | 6                                   | 12                                    | ●   |
| HR4   | 130   | 125±2        | 100   | 200   | 15    | AC 500 | 6                                   | 12                                    | ●   |
| HR5   | 135   | 130±2        | 105   | 200   | 15    | AC 500 | 6                                   | 12                                    | ●   |
| HR6   | 145   | 140±2        | 115   | 200   | 15    | AC 500 | 6                                   | 12                                    | ●   |
| HR7   | 150   | 145±2        | 120   | 200   | 15    | AC 500 | 6                                   | 12                                    | ●   |