

## Thermal Link HS Series

## 5A Series

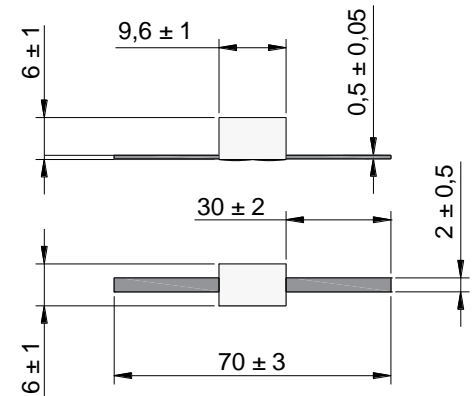
### Key Features

- Ceramic case
- Flat leads
- Non-resettable
- High accuracy of function temperature
- High operating voltage
- RoHS & REACH compliant






### Customization

- Other temperature can be customized
- The length of lead wires can be customized

### Dimensions



### Specification

Model	T <sub>f</sub>	Fusing Temp.	T <sub>h</sub>	T <sub>m</sub>	I <sub>r</sub>	U <sub>r</sub>					
	(°C)	(°C)	(°C)	(°C)	(A)	(V)	UL	cUL	CCC	TÜV	
HS125	125	121±2	98	250	5	AC 500	•	•	•	•	•
						DC 200	•	•	•	•	•
HS136	136	131±2	111	250	5	AC 500	•	•	•	•	•
						DC 200	•	•	•	•	•
HS145	145	140±2	118	250	5	AC 500	•	•	•	•	•
						DC 200	•	•	•	•	•