

## Thermal Link HW Series

## 15A Series


### Key Features

- Plastic case
- Non-resettable
- High accuracy of function temperature
- High operating voltage
- RoHS & REACH compliant


### Customization

- Other temperature can be customized
- The length of lead wires can be customized as required

### Dimensions

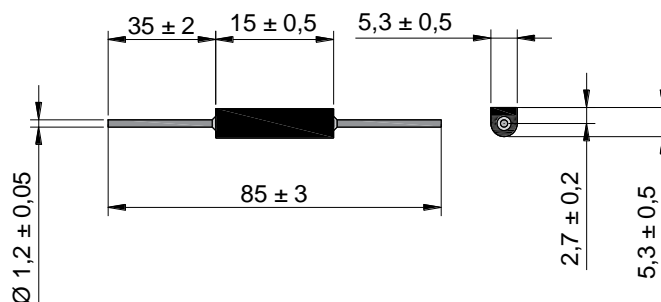

### Specification

Model	$T_f$	Fusing Temp.	$T_h$	$T_m$	$I_r$	$U_r$	$I_n$ 8/20 $\mu$ s (15 Times)	$I_{max}$ 8/20 $\mu$ s (1 Time)	
	(°C)	(°C)	(°C)	(°C)	(A)	(V)	(kA)	(kA)	
HW0	76	73±2	43	200	15	AC 800	5	10	●
HW18	86	81±2	51	200	15	AC 800	5	10	●
HW1	102	98±2	72	200	15	AC 800	6	12	●
HW2	115	111±2	85	200	15	AC 800	6	12	●
HW3	125	121±2	95	200	15	AC 800	6	12	●
HW4	130	125±2	100	200	15	AC 800	6	12	●
HW5	135	130±2	105	200	15	AC 800	6	12	●
HW6	145	140±2	115	200	15	AC 800	6	12	●
HW7	150	145±2	120	200	15	AC 800	6	12	●