

Thermal Link

KG Series

2A Series


Key Features

- Transparent plastic case
- Non-resettable
- High accuracy of function temperature
- Make a mounting hole
- RoHS & REACH compliant

Customization

- Other temperature can be customized
- The length of lead wires can be customized as required
- Lead wires can be insulated
- Tinned copper wires or copper plated steel wires

Dimensions

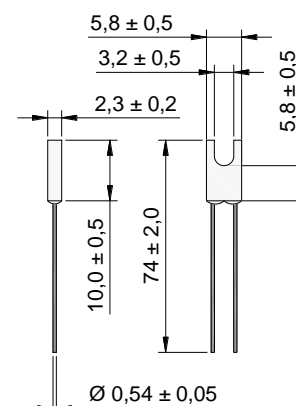

Screw torque for plastic case ≤0.4Nm

Specification

Model	T _f	Fusing Temp.	T _h	T _m	I _r	U _r						
	(°C)	(°C)	(°C)	(°C)	(A)	(V)	UL recognized	cUL recognized	TÜV	CCC	PSE	RoHS REACH
KG0	76	73±2	53	200	2	AC 250	●	●	●		●	●
KG18	86	81±2	61	200	2	AC 250	●	●	●		●	●
						DC 60	●	●				●
KG1	102	98±2	79	200	2	AC 250	●	●	●	●	●	●
						DC 60	●	●				●
KG2	115	111±2	91	200	2	AC 250	●	●	●	●	●	●
						DC 60	●	●				●
KG3	125	121±2	100	200	2	AC 250	●	●	●	●	●	●
						DC 60	●	●				●
KG4	130	125±2	106	200	2	AC 250	●	●	●	●	●	●
KG8	133	130±2	111	200	2	AC 250	●	●	●		●	●
KG5	135	130±2	111	200	2	AC 250	●	●	●		●	●
KG9	136	131±2	112	200	2	AC 250	●	●	●		●	●
KG6	145	140±2	121	200	2	AC 250	●	●	●		●	●
KG7	150	145±2	126	200	2	AC 250	●	●	●	●	●	●
KG16	160	154±2	135	200	2	AC 250			●		●	●
KG32	205	199±3	169	250	2	AC 250	●	●	●	●	●	●
KG31	221	218±2	188	250	2	AC 250	●	●	●	●	●	●