

## Thermal Link

## KM Series

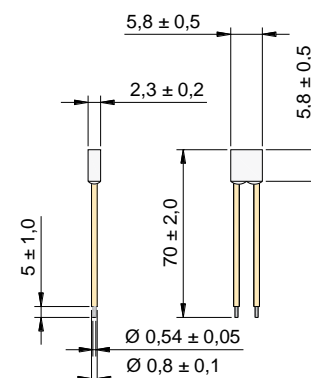
## 2A Series

### Key Features





- Transparent plastic case
- Non-resettable
- High accuracy of function temperature
- Rated voltage 300 VAC
- Lead wires insulated
- RoHS & REACH compliant

### Customization

- Other temperature can be customized
- The length of lead wires can be customized as required
- Tinned copper wires or copper plated steel wires



### Specification

Model	T <sub>f</sub>	Fusing Temp.	T <sub>n</sub>	T <sub>m</sub>	I <sub>r</sub>	U <sub>r</sub>				
	(°C)	(°C)	(°C)	(°C)	(A)	(V)	UL recognized	cUL recognized	TÜV	RoHS REACH
KM4	130	125±2	106	200	2	AC 300	●	●	●	●
KM5	135	130±2	111	200	2	AC 300	●	●	●	●
KM7	150	145±2	126	200	2	AC 300	●	●	●	●