

## Thermal Link K Series

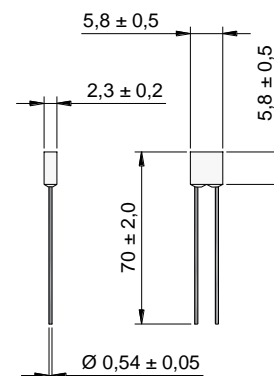
## 2A Series

### Key Features









- Transparent plastic case
- Non-resettable
- High accuracy of function temperature
- RoHS & REACH compliant

### Customization

- Other temperature can be customized
- The length of lead wires can be customized as required
- Lead wires can be insulated
- Tinned copper wires or CP wires



### Specification

Model	T <sub>f</sub>	Fusing Temp.	T <sub>h</sub>	T <sub>m</sub>	I <sub>r</sub>	U <sub>r</sub>								
	(°C)	(°C)	(°C)	(°C)	(A)	(V)	UL	cUL	PSE	VDE	TÜV	CCC	KTL	RoHS REACH
K0	76	73±2	53	200	2	AC 250	•	•	•			•		•
K18	86	81±2	61	200	2	AC 250	•	•	•	•		•	•	•
						DC 60	•	•						•
K1	102	98±2	79	200	2	AC 250	•	•	•	•	•	•	•	•
						DC 60	•	•						•
K2	115	111±2	91	200	2	AC 250	•	•	•	•	•	•	•	•
						DC 60	•	•						•
K3	125	121±2	100	200	2	AC 250	•	•	•	•	•	•	•	•
						DC 60	•	•						•
K4	130	125±2	106	200	2	AC 250	•	•	•	•	•	•	•	•
K8	133	130±2	111	200	2	AC 250	•	•	•	•	•	•	•	•
K5	135	130±2	111	200	2	AC 250	•	•	•	•	•	•	•	•
K9	136	131±2	112	200	2	AC 250	•	•	•	•	•	•	•	•
K6	145	140±2	121	200	2	AC 250	•	•	•	•	•	•	•	•
K7	150	145±2	126	200	2	AC 250	•	•	•	•	•	•	•	•
K16	160	154±2	135	200	2	AC 250			•			•		•
K32	205	199±3	169	250	2	AC 250	•	•			•	•		•
K31	221	218±2	188	250	2	AC 250	•	•			•	•		•