

## Thermal Link N Series


## 30A Series

### Key Features

- Transparent plastic case
- Non-resettable
- High accuracy of function temperature
- High surge capacity
- RoHS & REACH compliant

### Customization

- Other temperature can be customized
- The length of lead wires can be customized as required

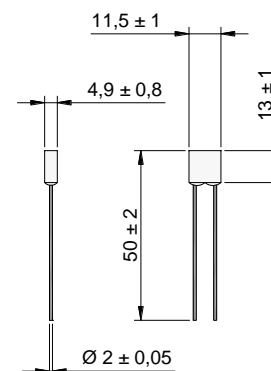

### Specification

Model	T <sub>i</sub>	Fusing Temp.	T <sub>h</sub>	T <sub>m</sub>	I <sub>r</sub>	U <sub>r</sub>	I <sub>n</sub> 8/20 μs (15 Times)	I <sub>max</sub> 8/20 μs (1 Time)	RoHS REACH
	(°C)	(°C)	(°C)	(°C)	(A)	(V)	(kA)	(kA)	RoHS REACH
N102	102	99±2	65	160	30	AC 250	20	40	●
N115	115	112±2	78	160	30	AC 250	20	40	●
N125	125	122±2	90	160	30	AC 250	20	40	●
N130	130	126±2	96	160	30	AC 250	20	40	●
N136	136	132±2	102	160	30	AC 250	20	40	●
N150	150	146±2	116	160	30	AC 250	20	40	●