

Thermal Link PD Series


20A Series

Key Features


- Transparent plastic case
- Non-resettable
- High accuracy of function temperature
- RoHS & REACH compliant

Customization

- Other temperature can be customized
- The length of lead wires can be customized as required

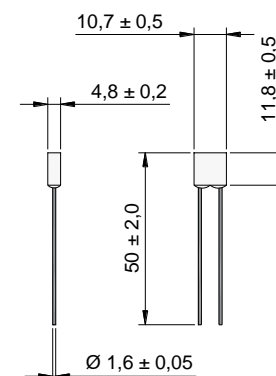

Specification

Model	T_i	Fusing Temp.	T_h	T_m	I_r	U_r	 RoHS REACH
	(°C)	(°C)	(°C)	(°C)	(A)	(V)	
PD102	102	98±2	66	160	20	AC 125	●
PD115	115	111±2	82	160	20	AC 125	●
PD125	125	121±2	90	160	20	AC 125	●
PD130	130	125±2	97	160	20	AC 125	●
PD136	136	131±2	102	160	20	AC 125	●
PD150	150	145±2	117	160	20	AC 125	●