

## Thermal Link P Series


## 20A Series

### Key Features

- Plastic case
- Non-resettable
- High accuracy of function Temperature
- High surge capacity
- RoHS & REACH compliant

### Customization

- Other temperature can be customized
- The length of lead wires can be customized as required

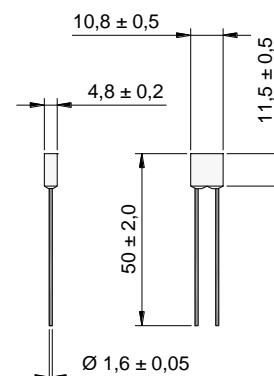

### Specification

Model	T <sub>f</sub>	Fusing Temp.	T <sub>h</sub>	T <sub>m</sub>	I <sub>r</sub>	U <sub>r</sub>	I <sub>n</sub> 8/20 μs (15 Times)	I <sub>max</sub> 8/20 μs (1 Time)	UL <sup>®</sup>	cUL <sup>®</sup>	CCC <sup>®</sup>	TÜV Rheinland <sup>®</sup>	RoHS REACH
	(°C)	(°C)	(°C)	(°C)	(A)	(V)	(kA)	(kA)	UL	cUL	CCC	TÜV	
P102	102	98±2	66	200	20	AC 400	15	25			•	•	•
						DC 120							
P115	115	111±2	82	200	20	AC 250	15	25	•	•			•
						AC 400							
						DC 120							
P125	125	121±2	90	200	20	AC 400	15	25			•	•	•
						DC 120							
P136	136	131±2	102	200	20	AC 250	15	25	•	•			•
						AC 400							
						DC 120							