

## Thermal Link

## QD Series


## 25A Series

### Key Features


- Transparent plastic case
- Non-resettable
- High accuracy of function temperature
- RoHS & REACH compliant

### Customization

- Other temperature can be customized
- The length of lead wires can be customized as required

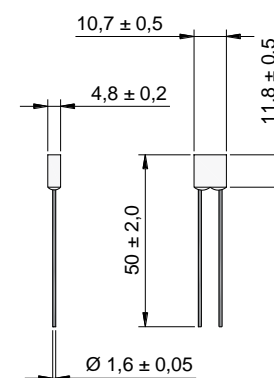

### Specification

Model	T <sub>f</sub>	Fusing Temp.	T <sub>h</sub>	T <sub>m</sub>	I <sub>r</sub>	U <sub>r</sub>	 RoHS REACH
	(°C)	(°C)	(°C)	(°C)	(A)	(V)	
QD102	102	98±2	66	160	25	AC 125	●
QD115	115	111±2	82	160	25	AC 125	●
QD125	125	121±2	90	160	25	AC 125	●
QD130	130	125±2	97	160	25	AC 125	●
QD136	136	131±2	102	160	25	AC 125	●
QD150	150	145±2	117	160	25	AC 125	●