

## Thermal Link SD Series


## 10A Series

### Key Features


- Transparent plastic case
- Non-resettable
- High accuracy of function temperature
- RoHS & REACH compliant

### Customization

- Other temperature can be customized
- The length of lead wires can be customized as required

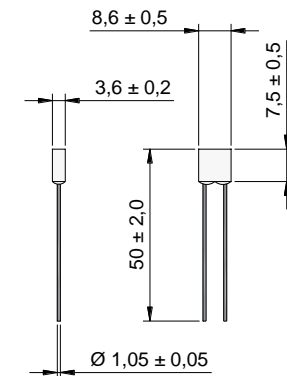

### Specification

Model	$T_f$	Fusing Temp.	$T_h$	$T_m$	$I_r$	$U_r$	
	(°C)	(°C)	(°C)	(°C)	(A)	(V)	
SD102	102	$98 \pm 2$	72	160	10	AC 125	●
SD115	115	$111 \pm 2$	85	160	10	AC 125	●
SD125	125	$121 \pm 2$	95	160	10	AC 125	●
SD130	130	$125 \pm 2$	100	160	10	AC 125	●
SD136	136	$131 \pm 2$	106	160	10	AC 125	●
SD150	150	$145 \pm 2$	120	160	10	AC 125	●