

Thermal Link SD Series


10A Series

Key Features


- Transparent plastic case
- Non-resettable
- High accuracy of function temperature
- RoHS & REACH compliant

Customization

- Other temperature can be customized
- The length of lead wires can be customized as required

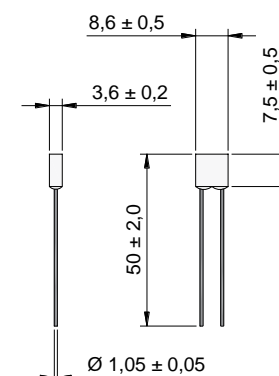

Specification

Model	T _i	Fusing Temp.	T _h	T _m	I _r	U _r	 RoHS REACH
	(°C)	(°C)	(°C)	(°C)	(A)	(V)	
SD102	102	98±2	72	160	10	AC 125	●
SD115	115	111±2	85	160	10	AC 125	●
SD125	125	121±2	95	160	10	AC 125	●
SD130	130	125±2	100	160	10	AC 125	●
SD136	136	131±2	106	160	10	AC 125	●
SD150	150	145±2	120	160	10	AC 125	●