

Thermal Link SKL Series

10A Series


Key Features

- Ceramic case
- Make a mounting hole
- AWG 16 lead wire is insulated
- Non-resettable
- High accuracy of function temperature
- RoHS & REACH compliant

Customization

- Other temperatures can be customized
- The length of lead wires can be customized as required
- Lead wires can make a pluggable terminals

Dimensions

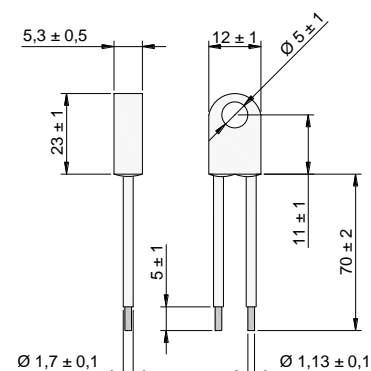

Specification

Model	T_f	Fusing Temp.	T_h	T_m	I_r	U_r	CCC	TÜV	RoHS REACH
	(°C)	(°C)	(°C)	(°C)	(A)	(V)	CCC	TÜV	RoHS REACH
SKL200	200	196±3	160	380	10	AC 250	•	•	•
SKL230	230	225±2	190	380	10	AC 250	•	•	•