

## Thermal Link SY Series

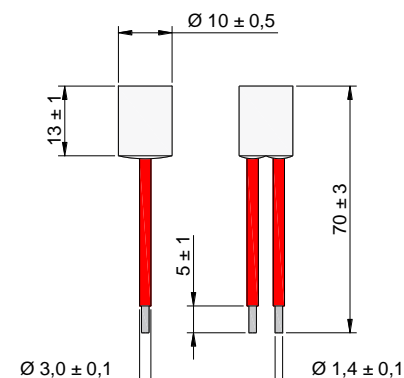
## 10A Series

### Key Features



- Ceramic case
- Lead wire is insulated
- Non-resettable
- High accuracy of function temperature
- RoHS & REACH compliant

### Customization

- Other temperatures can be customized
- The length of lead wires can be customized as required
- Lead wires can make a pluggable terminals



### Specification

Model	$T_f$	Fusing Temp.	$T_h$	$T_m$	$I_r$	$U_r$		
	(°C)	(°C)	(°C)	(°C)	(A)	(V)	CCC	RoHS REACH
SY95	95	91±2	60	180	10	AC 250	●	●
SY105	105	100±2	72	180	10	AC 250	●	●
SY115	115	111±2	85	180	10	AC 250	●	●
SY120	120	115±2	90	180	10	AC 250	●	●
SY125	125	121±2	95	180	10	AC 250	●	●
SY130	130	125±2	100	180	10	AC 250	●	●
SY145	145	140±2	115	180	10	AC 250	●	●