


TAMURA HU-F Series

Thermal Cutoffs (Conform with RoHS Directive)

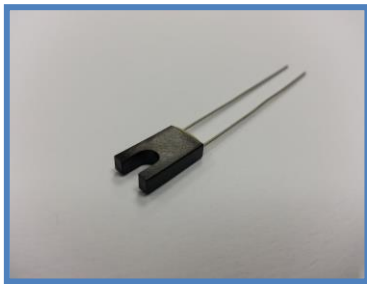


Explanation of Terminology

- Rated functioning temperature T_f
 T_f is operating temperature defined by the safety standard.
DENAN $\pm 7^\circ\text{C}$
The other standards $+0, -10^\circ\text{C}$
- Functioning temperature
It is temperature at which thermal cutoffs operate in the oil bath which goes up $0.5^\circ\text{C}/\text{min}$. And it is a criterion for using cutoffs.

- TH
The maximum holding temp at which no fuse will start working even if rated current was continuously flown for 168 hours.
- TM
The maximum temp at which no reconduction will be caused for 10 minutes for thermal cutoffs.
- Approval No.
UL, C-UL; E73591
VDE; 40009806

Cautions : Please exchange specifications, before adoption.

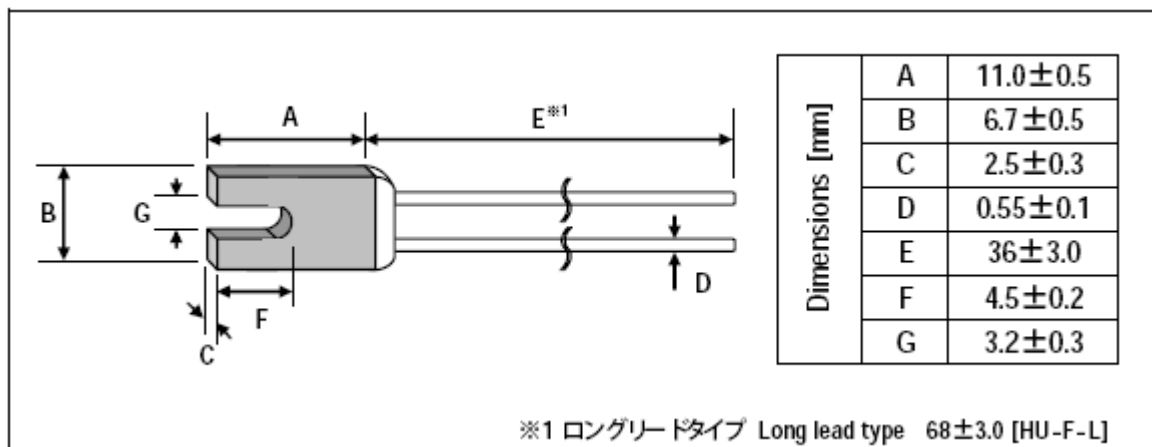

Red marked components are discontinued.
The latest order option for these components is October 2017.

Type No.	Tf [°C]	Functioning temperature [°C]	Rating			TH [°C]	TM [°C]	Approved*2			
			AC/ DC	Voltage [V]	Current [A]			UL C-UL	VDE	BEA B	CCC
HU06F	65	61±3	AC	250	2.5	50	200	O	O	O	O
HU0F	76	72±3	AC	250	2.5	50	200	O	O	O	O
				125	3.0	50		O	O	O	-
HU1F	86	81±2	AC	250	2.5	60	200	O	O	O	O
				125	3.0	60		O	O	O	-
HU2F	102	98±3	AC	250	3.0	75	200	O	O	O	O
				125	3.5	65		O	O	O	-
			DC	50	4.0	60		O	O	O	/
HU3F	115	111±2	AC	250	3.0	95	200	O	O	O	O
				125	3.5	90		O	O	O	-
			DC	50	4.0	90		O	O	O	/
HU4F	127	123±2	AC	250	3.0	100	200	O	O	O	O
				125	3.5	95		O	O	O	-
			DC	50	4.0	95		O	O	O	/
HU13F	133	129±3	AC	250	3.0	100	200	O	O	O	O
				125	3.5	95		O	O	O	-
			DC	50	4.0	90		O	O	O	/
HU5F	136	131±2	AC	250	3.0	100	200	O	O	O	O
				125	3.5	95		O	O	O	-
			DC	50	4.0	90		O	O	O	/
HU6F	139	134±2	AC	250	2.5	110	200	O	O	O	O
				125	3.5	105		O	O	O	-
			DC	50	4.0	100		O	O	O	/
HU7F	145	140±2	AC	250	2.0	115	200	O	O	O	O
				125	3.5	110		O	O	O	-
			DC	50	4.0	105		O	O	O	/

O Approved

*2 All Products are approved by DENAN (AC 250V)

Änderungen und Irrtümer vorbehalten

05 / 2017

Alpha Therm GmbH

Gewerbering 7

68723 Plankstadt

Tel: +49 (0) 6202 / 575688 - 0

E-Mail: sales@alpha-therm.de

Fax: +49 (0) 6202 / 575688 - 10

Web: www.alpha-therm.com