


## TAMURA N-F Series

### Thermal Cutoffs (Conform with RoHS Directive)

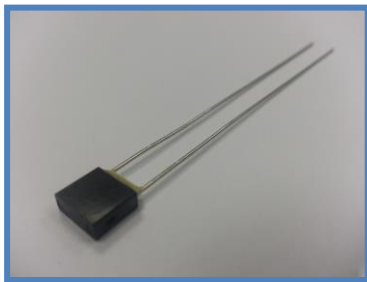


#### Explanation of Terminology

- Rated functioning temperature  $T_f$   
 $T_f$  is operating temperature defined by the safety standard.  
DENAN  $\pm 7^\circ\text{C}$   
The other standards  $+0, -10^\circ\text{C}$
- Functioning temperature  
It is temperature at which thermal cutoffs operate in the oil bath which goes up  $0.5^\circ\text{C}/\text{min}$ . And it is a criterion for using cutoffs.

- TH  
The maximum holding temp at which no fuse will start working even if rated current was continuously flown for 168 hours.
- TM  
The maximum temp at which no reconnection will be caused for 10 minutes for thermal cutoffs.
- Approval No.  
UL, C-UL; E73591  
VDE; 40009789

Cautions : Please exchange specifications, before adoption.

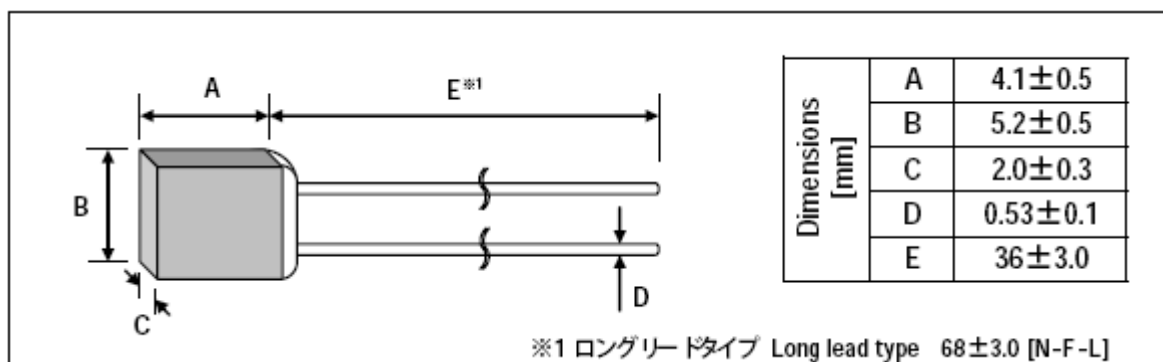

Red marked components are discontinued.

The latest order option for these components is October 2017.

Type No.	Tf [°C]	Functioning temperature [°C]	Rating			TH [°C]	TM [°C]	Approved* <sup>2</sup>			
			AC/ DC	Voltage [V]	Current [A]			UL C-UL	VDE	BEA B	CCC
N06F	65	61±3	AC	250	1.0	50	200		O	O	O
N0F	76	72±3	AC	250	1.0	50	200	O	O	O	O
				125	1.5	50		O	O	O	-
			DC	50	2.0	50		O	O	O	
N1F	86	81±2	AC	250	1.0	60	200	O	O	O	O
				125	2.0	60		O	O	O	
			DC	50	2.5	60		O	O	O	
N2F	102	98±3	AC	250	1.0	75	200	O	O	O	O
				125	2.5	65		O	O	O	-
			DC	50	3.0	60		O	O	O	
N3F	115	111±2	AC	250	1.0	95	200	O	O	O	O
				125	2.5	90		O	O	O	-
			DC	50	3.0	90		O	O	O	
N4F	127	123±2	AC	250	1.0	105	200	O	O	O	O
				125	2.5	100		O	O	O	-
			DC	50	3.0	95		O	O	O	
N13F	133	129±3	AC	250	1.0	105	200	O	O	O	O
				125	2.5	100		O	O	O	-
			DC	50	3.0	95		O	O	O	
N5F	136	131±2	AC	250	1.0	100	200	O	O	O	O
				125	2.5	95		O	O	O	-
			DC	50	3.0	90		O	O	O	
N6F	139	134±2	AC	250	1.0	110	200	O	O	O	O
				125	2.5	105		O	O	O	-
			DC	50	3.0	100		O	O	O	
N7F	145	140±2	AC	250	1.0	125	200	O	O	O	O
				125	2.5	120		O	O	O	-
			DC	50	3.0	120		O	O	O	

O Approved

\*<sup>2</sup> All Products are approved by DENAN (AC 250V)

Änderungen und Irrtümer vorbehalten

05 / 2017

**Alpha Therm GmbH**

Gewerbering 7

68723 Plankstadt

Tel: +49 (0) 6202 / 575688 – 0

E-Mail: [sales@alpha-therm.de](mailto:sales@alpha-therm.de)

Fax: +49 (0) 6202 / 575688 - 10

Web: [www.alpha-therm.com](http://www.alpha-therm.com)