

Thermal Link TD Series


15A / 16A Series

Key Features


- Transparent plastic case
- Non-resettable
- High accuracy of function temperature
- RoHS & REACH compliant

Customization

- Other temperature can be customized
- The length of lead wires can be customized as required
- Lead wires can be insulated

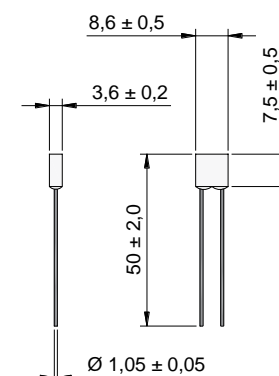

Specification

Model	T_f	Fusing Temp.	T_h	T_m	I_r	U_r	 RoHS REACH
	(°C)	(°C)	(°C)	(°C)	(A)	(V)	
TD102	102	98±2	72	160	15/16	AC 125	●
TD115	115	111±2	85	160	15/16	AC 125	●
TD125	125	121±2	95	160	15/16	AC 125	●
TD130	130	125±2	100	160	15/16	AC 125	●
TD136	136	131±2	106	160	15/16	AC 125	●
TD150	150	145±2	120	160	15/16	AC 125	●