

## Thermal Link TG-C Series

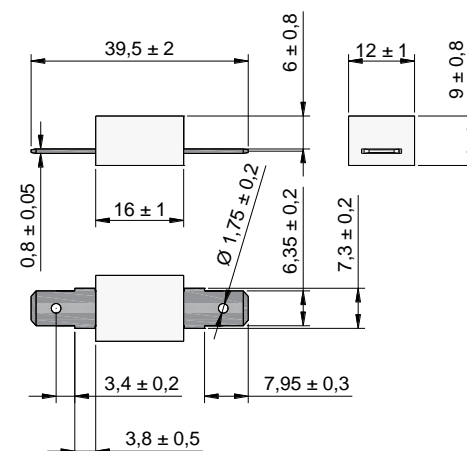
## 15A / 20A Series

### Key Features




- Ceramic case
- Non-resettable
- High accuracy of function temperature
- High operating voltage
- RoHS & REACH compliant

### Customization

- Other temperature can be customized
- The shape of the connection leads can be customized as required



### Specification

Model	T <sub>f</sub>	Fusing Temp.	T <sub>h</sub>	T <sub>m</sub>	I <sub>r</sub>	U <sub>r</sub>			
	(°C)	(°C)	(°C)	(°C)	(A)	(V)	UL recognized	cUL recognized	RoHS REACH
TG86C	86	81±5	43	250	15	DC 450	●	●	●
TG102C	102	97±5	65	250	15	DC 450	●	●	●
					20	DC 400	●	●	●
TG115C	115	110±5	72	250	15	DC 450	●	●	●
					20	DC 400	●	●	●
TG125B	125	122±2	90	250	15	AC 690	●	●	●
TG125C	125	120±5	85	250	15	DC 450	●	●	●
					20	DC 400	●	●	●
TG136C	136	131±5	100	250	15	DC 450	●	●	●
					20	DC 400	●	●	●
TG150C	150	145±5	115	250	15	DC 450	●	●	●
					20	DC 400	●	●	●