

Thermal Link TG Series

15A Series


Key Features

- Ceramic case
- Non-resettable
- High accuracy of function temperature
- High operating voltage
- RoHS & REACH compliant

Customization

- Other temperature can be customized
- The shape of the connection leads can be customized as required

Dimensions

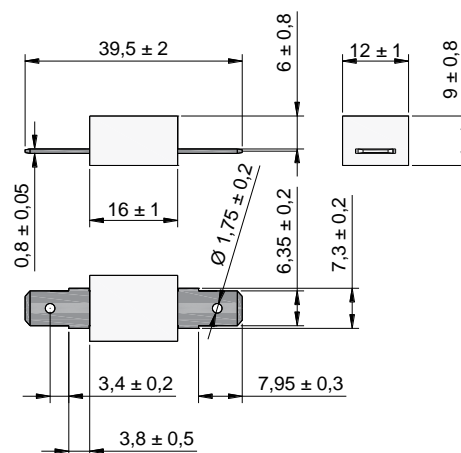

Specification

Model	T _f	Fusing Temp.	T _h	T _m	I _r	U _r	UL [®]	cUL [®]	RoHS REACH
	(°C)	(°C)	(°C)	(°C)	(A)	(V)	UL	cUL	
TG86	86	81±2	51	250	15	DC 450			•
TG102	102	99±2	64	250	15	DC 450			•
TG115	115	111±2	80	250	15	DC 450			•
TG125	125	122±2	90	250	15	DC 450	•	•	•
TG125B	125	122±2	90	250	20	AC 690	•	•	•
						DC 400	•	•	•
TG130	130	126±2	95	250	15	DC 450			•
TG136	136	132±2	102	250	15	DC 450			•
TG150	150	146±2	117	250	15	DC 450			•