

Thermal Link TM Series

15A / 16A Series

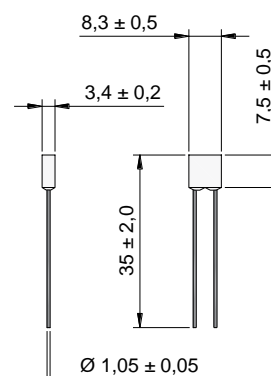
Key Features

- Plastic case
- Non-resettable
- High accuracy of function temperature
- Rated voltage 300 VAC
- High surge capacity
- RoHS & REACH compliant





Customization

- Other temperature can be customized
- The length of lead wires
- Lead wires can be insulated

Dimensions



Specification

Model	T _f	Fusing Temp.	T _h	T _m	I _r	U _r	I _n 8/20μs (15 Times)	I _{max} 8/20μs (1 Times)				
	(°C)	(°C)	(°C)	(°C)	(A)	(V)	(kA)	(kA)	UL recognized	cUL recognized	TÜV	RoHS REACH
TM102	102	98±2	72	200	15 / 16	AC 300	6	12	●	●	●	●
TM115	115	111±2	85	200	15 / 16	AC 300	6	12	●	●	●	●
TM136	136	131±2	106	200	15 / 16	AC 300	6	12	●	●	●	●
TM150	150	145±2	118	200	15 / 16	AC 300	6	12	●	●	●	●