

Thermal Link TV Series

70A Series


Key Features

- Rated current 70A
- Non-resettable
- High accuracy of function temperature
- Pins with mounting holes


Customization

- Other temperature can be customized
- The shape of connection leads can be customized as required

Dimensions

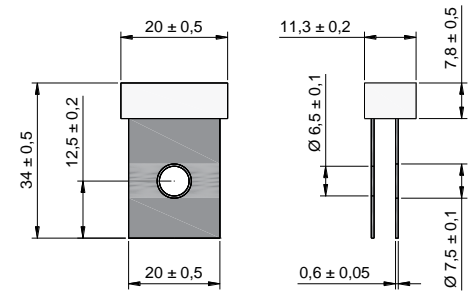

Specification

Model	T_f	Fusing Temp.	T_h	T_m	I_r	U_r	
	(°C)	(°C)	(°C)	(°C)	(A)	(V)	
TV125	125	122±2	84	180	70	DC 60	●
TV136	136	132±2	94	180	70	DC 60	●