

Thermal Link TY Series


15A / 16A Series

Key Features

- Ceramic case
- Lead wire is insulated
- Non-resettable
- Alloy type thermal-link
- RoHS & REACH compliant

Customization

- Other temperatures can be customized
- The length of lead wires can be customized as required
- Lead wires can make a pluggable terminals

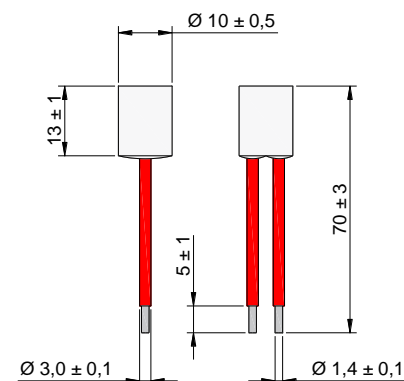

Specification

Model	T _f	Fusing Temp.	T _h	T _m	I _r	U _r	CCC	RoHS REACH
	(°C)	(°C)	(°C)	(°C)	(A)	(V)	CCC	RoHS REACH
TY95	95	91±2	60	180	15/16	AC 250	●	●
TY105	105	100±2	72	180	15/16	AC 250	●	●
TY115	115	111±2	85	180	15/16	AC 250	●	●
TY120	120	115±2	90	180	15/16	AC 250	●	●
TY125	125	121±2	95	180	15/16	AC 250	●	●
TY130	130	125±2	100	180	15/16	AC 250	●	●
TY145	145	140±2	115	180	15/16	AC 250	●	●