

## Thermal Link T Series


## 15A / 16A Series

### Key Features

- Transparent plastic case
- Non-resettable
- High accuracy of function temperature
- High surge capacity
- RoHS & REACH compliant

### Customization

- Other temperature can be customized
- The length of lead wires
- Lead wires can be insulated

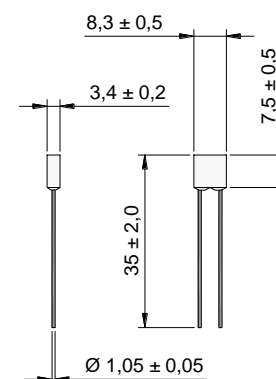

### Specification

Model	T <sub>f</sub>	Fusing Temp.	T <sub>h</sub>	T <sub>m</sub>	I <sub>r</sub>	U <sub>r</sub>	I <sub>n</sub> 8/20 μs (15 Times)	I <sub>max</sub> 8/20 μs (1 Time)	UL®	cUL®	VDE	CCC	PSE	RoHS REACH
	(°C)	(°C)	(°C)	(°C)	(A)	(V)	(kA)	(kA)	UL	cUL	VDE	CCC	PSE	RoHS REACH
T102	102	98±2	72	200	15 / 16	AC 250	6	12	•	•	•	•	•	•
T115	115	111±2	85	200	15 / 16	AC 250	6	12	•	•	•	•	•	•
T136	136	131±2	106	200	15 / 16	AC 250	6	12	•	•	•	•	•	•
T150	150	145±2	118	200	15 / 16	AC 250	6	12	•	•				•