

Thermal Link T Series


15A / 16A Series

Key Features

- Transparent plastic case
- Non-resettable
- High accuracy of function temperature
- High surge capacity
- RoHS & REACH compliant

Customization

- Other temperature can be customized
- The length of lead wires
- Lead wires can be insulated

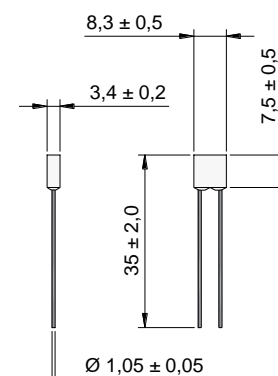

Specification

Model	T _f	Fusing Temp.	T _h	T _m	I _r	U _r	I _n 8/20 μs (15 Times)	I _{max} 8/20 μs (1 Time)	UL [®]	CUL [®]	VDE	CCC	PSE	RoHS REACH
	(°C)	(°C)	(°C)	(°C)	(A)	(V)	(kA)	(kA)	UL recognized	cUL recognized	VDE	CCC	PSE	RoHS REACH
T102	102	98±2	72	200	15 / 16	AC 250	6	12	●	●	●	●	●	●
T115	115	111±2	85	200	15 / 16	AC 250	6	12	●	●	●	●	●	●
T136	136	131±2	106	200	15 / 16	AC 250	6	12	●	●	●	●	●	●
T150	150	145±2	118	200	15 / 16	AC 250	6	12	●	●				●