

Thermal Link V Series


1A Series

Key Features





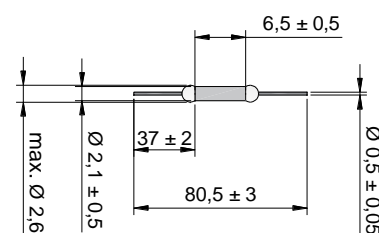


- Ceramic case
- Non-resettable
- High accuracy of function temperature
- RoHS & REACH compliant

Customization

- Other temperature can be customized
- The length of lead wires can be customized as required
- Taping packing available
- Lead wires can be insulated



Specifications

Model	T _f	Fusing Temp.	T _h	T _m	I _r	U _r							
	(°C)	(°C)	(°C)	(°C)	(A)	(V)	UL	cUL	TÜV	PSE	CCC	KTL	RoHS REACH
V0	76	73±2	53	200	1	AC 250			•	•	•	•	•
						AC 125	•	•					•
						DC 50	•	•					•
V18	86	81±2	61	200	1	AC 250			•	•	•	•	•
						AC 125	•	•					•
						DC 50	•	•					•
V21	97	93±2	70	200	1	AC 125	•	•					•
						DC 50	•	•					•
V1	102	98±2	79	200	1	AC 250			•	•	•	•	•
						AC 125	•	•					•
						DC 50	•	•					•
V2	115	111±2	91	200	1	AC 250	•	•	•	•	•	•	•
						DC 50	•	•					•
V3	125	121±2	100	200	1	AC 250	•	•	•	•	•	•	•
						DC 50	•	•					•
V4	130	125±2	106	200	1	AC 250	•	•	•	•	•	•	•
						DC 50	•	•					•
V8	133	130±2	111	200	1	AC 250	•	•	•	•	•	•	•
						DC 50	•	•					•
V5	135	130±2	111	200	1	AC 250	•	•	•	•	•	•	•
						DC 50	•	•					•
V9	136	131±2	112	200	1	AC 250	•	•	•	•	•	•	•
						DC 50	•	•					•
V13	139	135±2	115	200	1	AC 250	•	•	•	•	•	•	•
						DC 50	•	•					•
V6	145	140±2	121	200	1	AC 250	•	•	•	•	•	•	•
						DC 50	•	•					•
V7	150	145±2	126	200	1	AC 250	•	•	•	•	•	•	•
						DC 50	•	•					•
V16	160	154±2	135	200	1	AC 250			•		•		•
						DC 60			•		•		•
V32	205	199±3	169	250	1	AC 250			•		•		•
						AC 125	•	•					•
						DC 60	•	•	•				•
V31	221	218±2	188	250	1	AC 250	•	•	•		•		•
						AC 125	•	•					•
						DC 60	•	•	•				•

Changes and errors excepted