

Thermal Link XG Series

3A Series


Key Features

- Transparent plastic case
- Non-resettable
- High accuracy of function temperature
- Make a mounting hole
- RoHS & REACH compliant

Customization





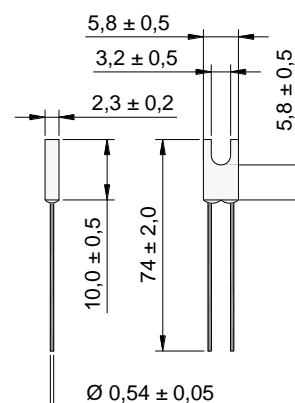

- Other temperature can be customized
- The length of lead wires can be customized as required
- Lead wires can be insulated
- Tinned copper wires or copper plated steel wires

Dimensions



Screw torque for plastic case ≤0.4Nm

Spezifikation

| Model | T _f | Fusing Temp. | T _h | T _m | I _r | U _r |  |  |  |  |  |  |
|-------|----------------|--------------|----------------|----------------|----------------|----------------|---|---|---|---|---|---|
| | (°C) | (°C) | (°C) | (°C) | (A) | (V) | UL recognized | cUL recognized | TÜV | CCC | PSE | RoHS REACH |
| XG0 | 76 | 73±2 | 53 | 200 | 3 | AC 250 | ● | ● | ● | ● | ● | ● |
| XG18 | 86 | 81±2 | 61 | 200 | 3 | AC 250 | ● | ● | ● | ● | ● | ● |
| | | | | | | DC 60 | ● | ● | | | | ● |
| XG1 | 102 | 98±2 | 79 | 200 | 3 | AC 250 | ● | ● | ● | ● | ● | ● |
| | | | | | | DC 60 | ● | ● | | | | ● |
| XG2 | 115 | 111±2 | 91 | 200 | 3 | AC 250 | ● | ● | ● | ● | ● | ● |
| | | | | | | DC 60 | ● | ● | | | | ● |
| XG3 | 125 | 121±2 | 100 | 200 | 3 | AC 250 | ● | ● | ● | ● | ● | ● |
| | | | | | | DC 60 | ● | ● | | | | ● |
| XG4 | 130 | 125±2 | 106 | 200 | 3 | AC 250 | ● | ● | ● | ● | ● | ● |
| XG8 | 133 | 130±2 | 111 | 200 | 3 | AC 250 | ● | ● | ● | ● | ● | ● |
| XG5 | 135 | 130±2 | 111 | 200 | 3 | AC 250 | ● | ● | ● | ● | ● | ● |
| XG9 | 136 | 131±2 | 112 | 200 | 3 | AC 250 | ● | ● | ● | ● | ● | ● |
| XG6 | 145 | 140±2 | 121 | 200 | 3 | AC 250 | ● | ● | ● | ● | ● | ● |
| XG7 | 150 | 145±2 | 126 | 200 | 3 | AC 250 | ● | ● | ● | ● | ● | ● |
| XG16 | 160 | 154±2 | 135 | 200 | 3 | AC 250 | | | ● | ● | ● | ● |
| XG32 | 205 | 199±3 | 169 | 250 | 3 | AC 250 | ● | ● | ● | ● | ● | ● |
| XG31 | 221 | 218±2 | 188 | 250 | 3 | AC 250 | ● | ● | ● | ● | ● | ● |