

Thermal Link XM Series

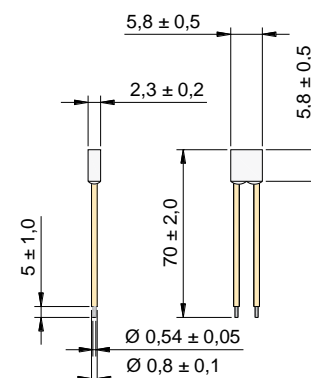
3A Series

Key Features





- Transparent plastic case
- Non-resettable
- High accuracy of function temperature
- Rated voltage 300 VAC
- Lead wires insulated
- RoHS & REACH compliant

Customization

- Other temperature can be customized
- The length of lead wires can be customized as required
- Tinned copper wires or copper plated steel wires



Specification

Model	T _f	Fusing Temp.	T _n	T _m	I _r	U _r				
	(°C)	(°C)	(°C)	(°C)	(A)	(V)	UL recognized	cUL recognized	TÜV	RoHS REACH
XM4	130	125±2	106	200	3	AC 300	●	●	●	●
XM5	135	130±2	111	200	3	AC 300	●	●	●	●
XM7	150	145±2	126	200	3	AC 300	●	●	●	●