

Thermal Link X Series

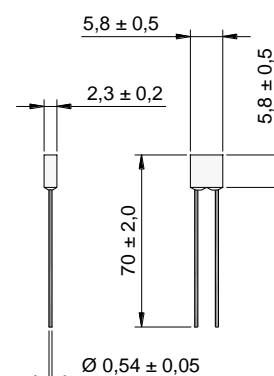
3A Series

Key Features









- Transparent plastic case
- Non-resettable
- High accuracy of function temperature
- RoHS & REACH compliant

Customization

- Other temperature can be customized
- The length of lead wires can be customized as required
- Lead wires can be insulated
- Tinned copper wires or copper plated steel wires



Specification

Model	T _i	Fusing Temp.	T _h	T _m	I _r	U _r								
	(°C)	(°C)	(°C)	(°C)	(A)	(V)	UL recognized	cUL recognized	PSE	VDE	TÜV	CCC	KTL	RoHS REACH
X0	76	73±2	53	200	3	AC 250	●	●	●			●		●
X18	86	81±2	61	200	3	AC 250	●	●	●	●		●	●	●
						DC 60	●	●					●	
X1	102	98±2	79	200	3	AC 250	●	●	●	●		●	●	●
						DC 60	●	●					●	
X2	115	111±2	91	200	3	AC 250	●	●	●	●		●	●	●
						DC 60	●	●					●	
X3	125	121±2	100	200	3	AC 250	●	●	●			●	●	●
						DC 60	●	●					●	
X4	130	125±2	106	200	3	AC 250	●	●	●	●		●	●	●
X8	133	130±2	111	200	3	AC 250	●	●	●	●		●	●	●
X5	135	130±2	111	200	3	AC 250	●	●	●	●		●	●	●
X9	136	131±2	112	200	3	AC 250	●	●	●	●		●	●	●
X6	145	140±2	121	200	3	AC 250	●	●	●	●		●	●	●
X7	150	145±2	126	200	3	AC 250	●	●	●	●		●	●	●
X16	160	154±2	135	200	3	AC 250			●			●		●
X32	205	199±3	169	250	3	AC 250	●	●			●	●		●
X31	221	218±2	188	250	3	AC 250	●	●			●	●		●