

## Thermal Link Y Series


## 5A Series

### Key Features

- Transparent plastic case
- Non-resettable
- High accuracy of function temperature
- RoHS & REACH compliant

### Customization

- Other temperature can be customized
- The length of lead wires can be customized as required
- Lead wires can be insulated
- Tinned copper wires or CP wires

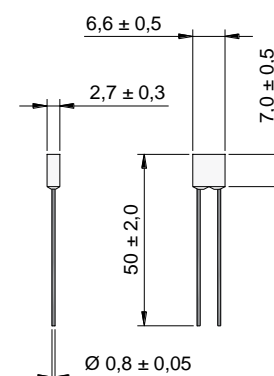

### Specification

Model	T <sub>f</sub>	Fusing Temp.	T <sub>h</sub>	T <sub>m</sub>	I <sub>r</sub>	U <sub>r</sub>	I <sub>n</sub> 8/20 μs (15 Times)	I <sub>max</sub> 8/20 μs (1 Time)	UL <sup>®</sup>	cUL <sup>®</sup>	PS E	D V E	CCC	KTL	RoHS REACH
	(°C)	(°C)	(°C)	(°C)	(A)	(V)	(kA)	(kA)	UL	cUL	PSE	VDE	CCC	KTL	RoHS REACH
Y0	76	73±2	53	200	5	AC 250	2	4	•	•	•		•		•
Y18	86	81±2	61	200	5	AC 250	2	4	•	•	•		•		•
Y1	102	98±2	77	200	5	AC 250	3	6	•	•	•		•	•	•
Y2	115	111±2	89	200	5	AC 250	3	6	•	•	•	•	•	•	•
Y3	125	121±2	98	200	5	AC 250	3	6	•	•	•	•	•	•	•
Y4	130	125±2	103	200	5	AC 250	3	6	•	•	•	•	•	•	•
Y8	133	130±2	108	200	5	AC 250	3	6	•	•	•	•	•	•	•
Y9	136	131±2	111	200	5	AC 250	3	6	•	•	•	•	•	•	•
Y6	145	140±2	118	200	5	AC 250	3	6	•	•	•				•
Y7	150	145±2	123	200	5	AC 250	3	6	•	•	•	•	•	•	•
Y16	160	154±2	133	200	5	AC 250	3.5	7			•		•		•