

PS3001/PS3002-H Series

Keystwitches

SPECIFICATIONS

RATING: 30mA / 28VDC

OPERATING SPEED: 10mm/sec

ELECTRIC LIFE: 20,000 cycles

FULL TRAVELS: 2.0mm

OPERATING TEMPERATURE: -40°C to 95°C

MATERIALS

PUSHER: POM Black

DUST PROTECTION CAP: POM Black



CASE: PA Nature glass fiber reinforced

SPRING: Piano wire

CONTACT/TERMINALS: Brass, silver plated




CIRCUIT



POLE OPTIONS

SPST






NOTE

Force: 3.4~6.4N


Operating position: 8.9 ± 0.2mm

P.C. MOUNTING



Part No. Shown : PS3001

SPDT



NOTE




Force 1: 5~7N

Force 2: 10~13N

Operating position 1: 9.7

Operating position 2: 8.9

P.C. MOUNTING

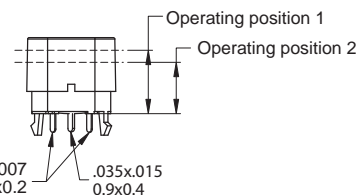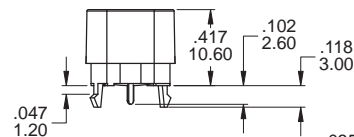

Part No. Shown : PS3002-H

PS3001/PS3002-H
Tact Switches