

Thermal Link P Series


20A Series

Key Features

- Plastic case
- Non-resettable
- High accuracy of function Temperature
- High surge capacity
- RoHS & REACH compliant

Customization

- Other temperature can be customized
- The length of lead wires can be customized as required

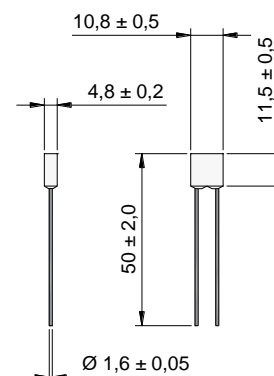

Specification

Model	T _f	Fusing Temp.	T _h	T _m	I _r	U _r	I _n 8/20 μs (15 Times)	I _{max} 8/20 μs (1 Time)					
	(°C)	(°C)	(°C)	(°C)	(A)	(V)	(kA)	(kA)	UL recognized	cUL recognized	CCC	TÜV	RoHS REACH
P102	102	98±2	66	200	20	AC 400	15	25			●	●	●
						DC 120							
P115	115	111±2	82	200	20	AC 250	15	25	●	●	●	●	●
						AC 400							
						DC 120							
P125	125	121±2	90	200	20	AC 400	15	25			●	●	●
						DC 120							
P136	136	131±2	102	200	20	AC 250	15	25	●	●	●	●	●
						AC 400							
						DC 120							